



Utilift MF 540



Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.

INTRODUCTION

Utilift MF 540 Scissor Lift with lifting capacity up to 4.5 tonnes and max. platform height of 4.5 m is designed to provide a safe work platform for all kinds of installation works in tunnels up to 6.5 m (21 feet) high.

Typical applications are fan installations, ventilation ducting, electrification works and piping for air and water services. Three platform sizes with side shift provide complete drift coverage from single setup practically in all kinds of mine headings. The works can be accomplished safely, efficiently and comfortably from the level work deck, elevated to a optimum work height. Optional remote drive system from the deck provides fully new type efficiency into installation and assembly works in underground mines.



Electric system is designed for harsh underground environment. System consist of self-extinguishing wire harnesses with tinned wires, water tight conduits and all exposed components are minimum IP 65 protection class. In addition, vehicle layout allows easy access to all service points, all daily checks can be done from the ground level.

POWER TRAIN

M-series units have powerful 4-cylinder liquid cooled turbo-charged engines, which power range is 120 kW. Available emission standards are Tier 3 / Stage IIIA and Stage V that provides clean and efficient operation.

Machine is equipped with Dana hydrodynamic transmission and planetary type axles which have hydraulically powered dual-circuit oil immersed multidisc service brakes. Moreover, axles have spring applied hydraulically released fail-safe -type parking/safety brake.

SAFETY AND USABILITY

Vehicle has an optional front axle suspension system, which improve safety, driving comfort and increases component lifetime.

Normet's FOPS and ROPS approved safety cabin provides superior visibility and comfortable compartment for the driver and the passenger. Cabin controls are easy and ergonomic to use, and the multifunctional display (MID) provides driving information (speed, RPM, temperatures, safety warnings & alarms etc.), which can be recorded for further analysis.

Enclosed cabin provides low noise level ensuring safe and comfortable driving.

TECHNICAL SPECIFICATION

LIFTING PLATFORM

Dimensions:

- 2000 X 4000 mm
 - Lifting capacity 4500 kg
 - Side shifting 550 mm
- 2400 X 4000 mm
 - Lifting capacity 4500 kg
 - Side shifting 650 mm
- 2400 X 5200 mm
 - Lifting capacity 4000 kg
 - Side shifting 650 mm

Max. Lifting height 4500 mm

Tilt +/- 8°

Start/stop from platform

Battery operated emergency pump

Side access gates to platform

Rear handrails of platform:

- Fixed handrail
- Gate for loading equipment on platform

Scissors movement alarm

Safety monitoring system of MEWP:

- Dangerous movement preventing system (mandatory in NAP, NAS, CE area)
- Dangerous movement warning system with overload monitoring

ENGINE AND TRANSMISSION

- **Deutz TCD 2013 L4, 120 kW/2300 rpm, Tier 3 / Stage IIIA approved**

Exhaust system for Deutz engine:

- Catalytic exhaust gas purifier and muffler
- Diesel particulate filter (DPF)

Fuel tank capacity 110 l

Dana 24000 series powershift transmission

3 speeds forward and reverse

4-wheel drive

Manual gear selector

- **Cummins B4.5, 120 kW/2500 rpm with exhaust brake, Stage V approved**

Requires diesel exhaust fluid (DEF) and Ultra-low sulphur diesel (ULSD)

Diesel particulate filter (DPF)

Selective catalytic reduction (SCR)

DEF tank capacity: 19 l

Fuel tank capacity: 105 l

Dana 24000 series powershift transmission with lock-up

3 speeds forward and reverse

4-wheel drive

Gear selector:

- Manual
- Automatic

PERFORMANCE

Tramming speed (horizontal):

Deutz 26 km/h

Cummins 26 km/h

Lateral gradient for tramming (continuous) 4°

Longitudinal gradient for tramming (continuous) 9°

Lateral gradient for operation 3°

AXLES AND BRAKES

Load end axle:

Dana 123 series fixed

Engine end axle:

Dana 123 series

- +/- 8° oscillation
- Hydro-pneumatic suspension and +/- 8° oscillation

Service brake: hydraulically powered dual-circuit oil immersed multidisc brakes in both axles

Safety/Parking brake: spring applied hydraulically released fail-safe -type brake

TYRES AND RIMS

- Nokian Tyres 12.00-20" with standard rims
- Nokian Tyres 12.00-20" with NDT inspected rims
- Bridgestone 12.00-20" with NDT inspected rims

STEERING

Orbitrol type hydraulic frame steering

Frame articulation +/- 40°

HYDRAULIC SYSTEM

Variable displacement pump system:
190 bar, 135 l/min at 2200 rpm

Hydraulic oil tank capacity 110 l

24 VDC ELECTRICAL SYSTEM

Main switch:

- Mechanical switch in battery box
- Electric switch with control in cabin and service switch in battery box
- Electric switch with control in cabin, start isolator and service switch in battery box

LED driving and indicator lights

LED work lights

LED side lights (left/right):

- White / White
- Green / Red
- Red / Green

Warning LED light:

Color

- Amber
- Blue
- Red
- Green (n/a with rotating light pattern)
- White (n/a with rotating light pattern)

Light pattern

- Strobe
- Rotating

DRIVER'S COMPARTMENT

Cabin type:

- Open cabin FOPS/ROPS approved
- Enclosed cabin FOPS/ROPS approved with sliding rear window

Driver's seat and seat belt:

- Air suspended T-back seat with 3-point seat belt
- Air suspended heavy duty seat with 3-point seat belt

Seat belt safety interlock for driver:

- Warning indicator in display
- Safety brake application

Cabin door interlock switches with safety brake application

Passenger's seat:

- T-back seat with 3-point seat belt
- Heavy duty seat with 3-point seat belt
- 2 person seat with fixed lap seat belts

Throttle and brake pedal layout:

- Front and side facing pedals with seat swivel
- Front facing pedals

Gear lever side:

- On right side of the steering wheel
- On left side of the steering wheel

MACHINE CONNECTIVITY

- Machine connectivity hardware (WLAN/3G/4G/LTE)
- Analytics license (includes connectivity hardware)

TECHNICAL DOCUMENTATION

Standard documents:

Instruction manuals, hard copy 2 pcs:

- English
- Russian
- One of destination EU languages

Spare parts manuals, hard copy 2 pcs:

- English
- Russian

PDF manuals on USB-stick 2 pcs, includes instruction and spare parts manuals

Additional documentation:

- Extra hard copies of manuals
- Extra PDF manuals
- LinkOne WebView electronic manuals
- Other than standard language manuals

OTHER

Powder extinguisher:

- 6 kg
- 12 kg
- Ansul Sentry

Number of extinguishers:

- 1
- 2

Painting and taping:

- Standard painting and taping
- Painting and taping according to customer specifications

Standard support legs at the load end and engine end

Text labels in:

- En/Ru/One of destination EU-languages
- Other language

Measurements:

- Noise
- Vibration
- Emissions

ACCESSORIES

PROCESS PRODUCTIVITY

- Fan rack, Max. diameter of fan 1250 mm

Platform size	Max. length of fan
2000 x 4000 mm	Fan rack not available
2400 x 4000 mm	3000 mm
2400 x 5200 mm	4250 mm
- Hydraulic pipe lifters:
 - Lifting capacity of pipe lifters 350 kg
 - Stroke length 600 mm
 - Pipe diameter 70 - 270 mm or pipes with a nominal value from 2½" to 10"
 - Reduces lifting capacity of platform 400 kg
- Hydraulic pipe lifters with tilt:
 - Lifting capacity of pipe lifters 350 kg
 - Stroke length 450 mm
 - Tilt -23°...+45°
 - Pipe outer diameter 25 - 335 mm or pipes with a nominal value from ¾" to 12"
 - Reduces lifting capacity of platform 400 kg
- Crane Hiab 029:
 - Lifting capacity 12 kNm, 350 kg/3,4 m
 - Two hydraulic extensions, max reach 3,4 m
 - Reduces lifting capacity of platform 1000 kg
 - Crane only available with 2400 x 5200 platform
 - Load monitoring
 - Installation to rear of platform, gate at rear required

Accessories:

 - Radio controller and controls for optional grapple
 - Grapple for crane:
 - Pipe diameter 60 - 440 mm
 - Max. opening 1040 mm
 - Radio remote control
 - Rotator for grapple
 - Reduces max lifting capacity of crane 80 kg
 - Only available with CE approved crane with radio controller
- Remote driving system (RDS)
 - Joystick drivable carrier from elevated platform
 - Speed of carrier, height of platform and incline of terrain limited to ensure safety
 - Only available with dangerous movement preventing system

- Hydraulic generator 400/230 V 50 Hz, 14.6 / 21.7 A
- 0,4 m³/min compressor with hose reel, air tank and tyre filling pistol
- 4 m³/min hydraulic driven compressor on front rack
- Compressed air inlet on carrier and air outlet in platform
- Welding kit
 - Includes welding generator (180 A welding current and 230V/400VAC output voltage) and welder's equipment; mask, gloves, scratch brush and slag hammer
- Toolbox on platform
- Scaling bars with rack:
 - bar lengths 1.8, 2.4 and 3.0 m

CARRIER PRODUCTIVITY

- Accessories for open cabin:
 - Protective grids
 - Windshield with wipers
- Accessories for enclosed cabin:
 - Audio system
 - Air conditioning with heating
 - Heated mirrors
- 12 V, 18 A power supply in cabin with socket and connector
- Auto engine shutdown during idling
- Engine shutdown delay
- Inlet plug for jump start
- Block heater with interior heater and battery charger 230 V (Interior heater available with enclosed cabin)
- Block heater with interior heater, battery charger, hydraulic oil and filter heaters 400 V (Interior heater available with enclosed cabin)
- Fuel operated pre-heater
- Fast fuel filling system
- Hand pump for filling of hydraulic tank
- Fluid evacuation panel with sampling points
- Automatic lubrication system
- Reversing camera:
 - 1 camera, 1 display
 - 3 cameras, 2 displays
 - 1 camera, 1 display and reversing radar
 - 4 cameras, 1 display with recording support
- Spare rim and tyre
- Toolbox and maintenance tools
- Interior cooling fan
- Wax tape for electric connectors

SAFETY

- Safety roof or bar on work platform
 - Hydraulic liftable safety bar
 - Safety roof with hydraulic lift and slide
 - Reduces lifting capacity 300 kg
- Cabin door puddle lights
- Extra warning LED light
 - Color
 - Amber
 - Blue
 - Red
 - Green (n/a with rotating light pattern)
 - White (n/a with rotating light pattern)
 - Light pattern
 - Strobe
 - Rotating
- Fire extinguisher system, 3 point activation (cabin, engine end and work platform)
 - Dry chemical
 - Ansul A-101
 - Manual
 - Automatic, Checkfire 110
 - Liquid agent
 - Fogmaker (Automatic)
- Gear lockout:
 - Forward:
 - Highest gear locked out
 - 2 highest gears locked out
 - Reverse:
 - Highest gear locked out
 - 2 highest gears locked out
- Engine end safety rails and ladder
- Front and rear grounding straps
 - Flat cable
 - Chain
- Pump for brake release
 - Electric pump
 - Hand pump
- Redundant brake monitoring system
- Hydraulic pressure monitoring kit
- Methane monitoring system
- Protection guards for tunnel curtains
- Tyre pressure indicators
- Additional wide angle mirrors (n/a with heated mirrors)
- Warning triangles
- Flashlight with charger
- Hearing protectors
- Wheel chocks with brackets

SERVICES

NORMET SERVICES

Normet is committed to servicing its customers all over the world. We provide service from a single machine to an entire fleet. The Normet service offering consists of many different products from delivery of parts and training to fleet performance agreements.

More information check [normet.com](https://www.normet.com):

<https://www.normet.com/en/products-and-services>

For any questions about Normet Services contact local Normet.

<https://www.normet.com/en/contact/>

SPARE PARTS

As a leading global Original Equipment Manufacturer, we are committed to providing a complete solution to your spare parts needs. All of Normet's spare parts are manufactured to the highest possible standards to help maintain the safety and profitability of your projects. Our spare parts improve efficiency and total cost of ownership throughout your operations.

Start a carefree journey with Normet equipment by having the right selection of parts available from the beginning.

Spare part recommendation / Start-up Spare Part package:

Available for the first 2000h*: includes periodical service parts, most common wearing parts and other recommended parts. (*Recommendations are based on average hours that can vary depending on worksite conditions.)

Underground, every part is critical!

More information check <https://www.normet.com>

SERVICE AGREEMENTS

Service agreements are always customized to meet our customer needs, consisting of various Normet service products. The service solution is created together with the customer and the level of an agreement can vary with different support agreements (including e.g. parts, periodical maintenance, on-call services, and audits) up to guaranteed fleet availability or process performance (including e.g. parts, all maintenance activities, operator trainings and process audits).

Note that we can provide Digital solutions with connected equipment.

More information check [normet.com](https://www.normet.com).

TRAININGS

Training services can be tailored to your individual needs and range from equipment service training to process application training.

We offer a sustainable training path from the beginning of your operation to the execution stage of your project.

More information check [normet.com](https://www.normet.com).

COMMISSIONING

Equipment commissioning concerns **equipment familiarization**. This is included as part of Normet vehicle delivery. Safety introduction and operating basics for Normet Equipment. Review of Normet user and spare parts manuals. Hands-on equipment safety device operational training. Ensure product quality and customer satisfaction during handover.

Commissioning includes machinery handover to customers and safety operating principles without technical insights or process application training.

EXTENDED COMMISSIONING

We offer an extended training package on top of standard commissioning. Normet provides extended commissioning services that offer basic insights into maintenance manuals, periodical and daily maintenance, as well as modern operating perspectives to maximize handling efficiency. Safety-oriented training ensures reliable operations for Battery Electric Vehicles and Diesel-Driven based on your vehicle fleet. This cost-effective solution covers the essential aspects of equipment operation, safety, and maintenance schedules.

To ensure continuous and maximized safe operations with your new equipment and to expand your knowledge scale of operations, this option is the most suitable and recommended option for extending your new equipment training. This cost-effective solution covers the essential aspects of equipment operation, safety, and maintenance schedules.

UPGRADES AND MODIFICATIONS

We build our machines to last. We also understand that your needs on the ground can change - and reacting to that change makes a big difference in your productivity. Normet Upgrades & Modifications provide you with access to product improvements that meet your evolving requirements and let you stay one step ahead of the curve.


Contact your local Normet office for Upgrade offering to your fleet.

More information check [normet.com](https://www.normet.com).


DIMENSIONS

Length	8660 mm	Track	1670 mm
Width	2040 mm	Ground clearance as shown	360 mm
Height	2680 mm	Turning radius outer	6480 mm
Height of cabin	2300 mm	Turning radius inner	3840 mm
Wheel base	3650 mm		


SIDE VIEW – BASIC MACHINE

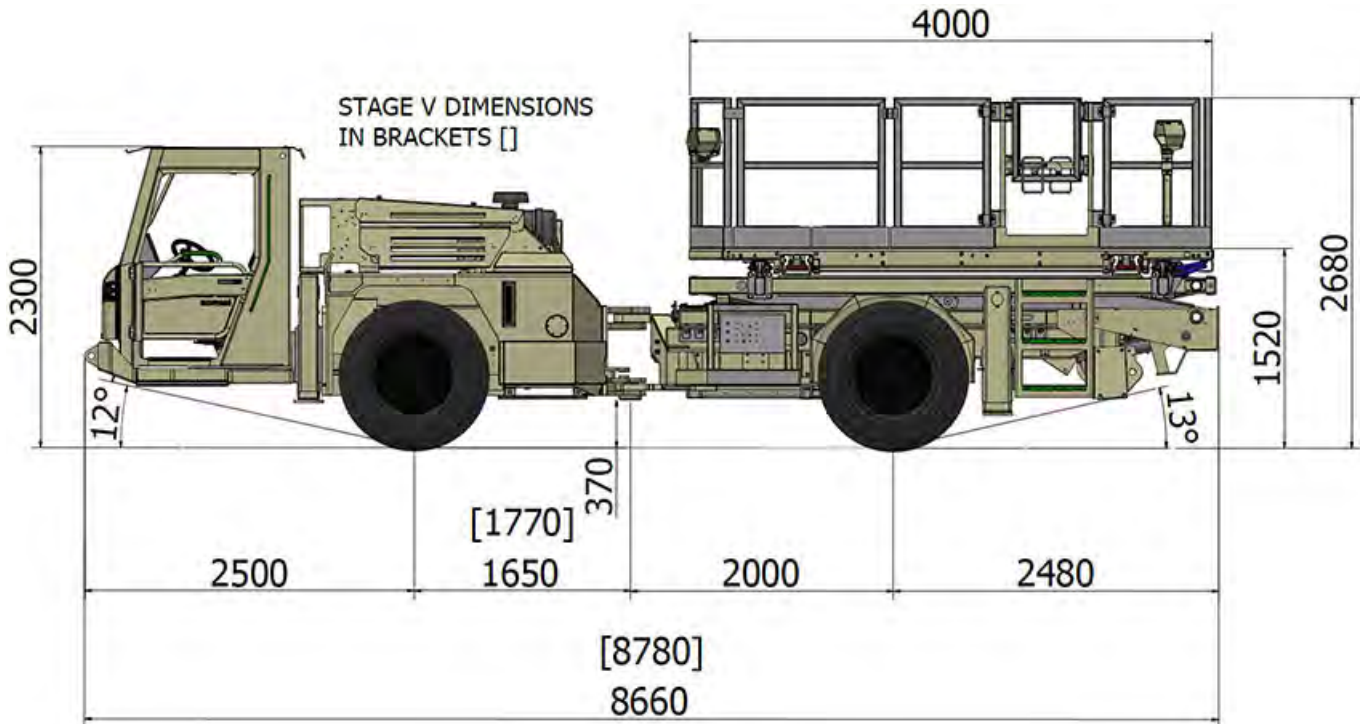

SIDE VIEW – BASIC MACHINE WITH LIFTED PLATFORM

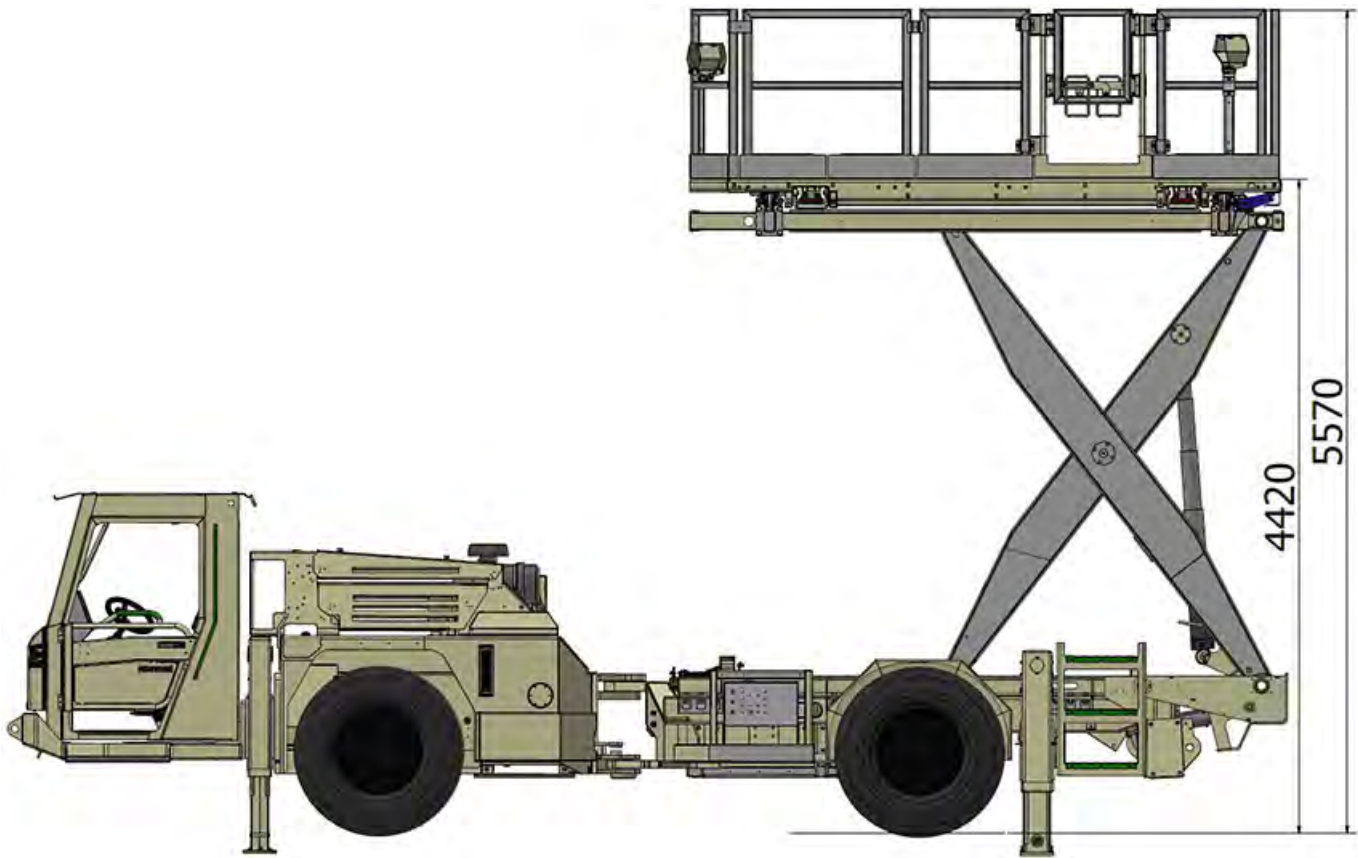


SIDE VIEW – MACHINE WITH SAFETY ROOF

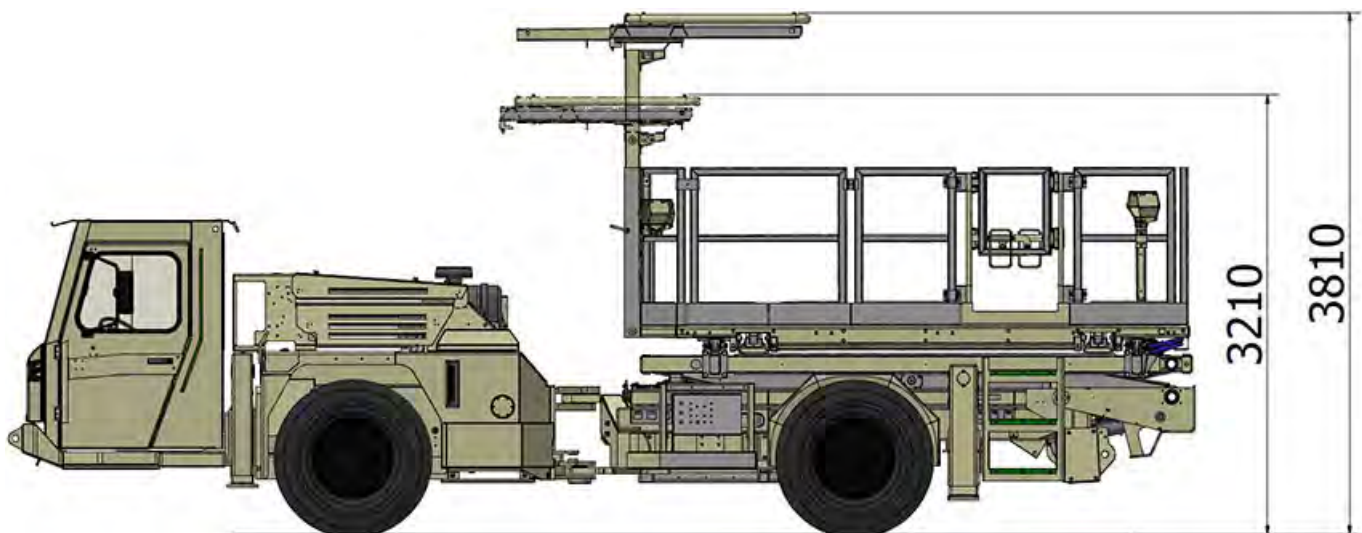

Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.


SIDE VIEW – CRANE REACH

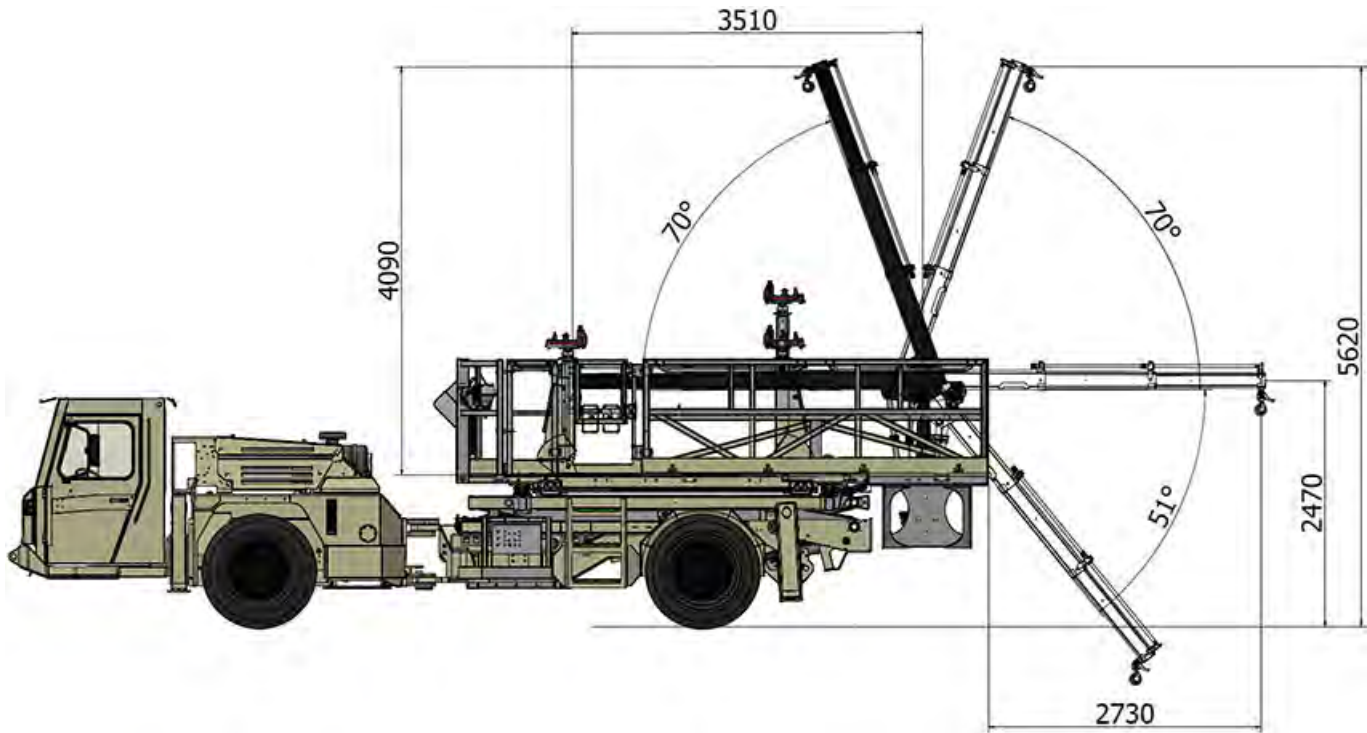


Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.


SIDE VIEW – MACHINE WITH OPTIONS IN MAX HEIGHT

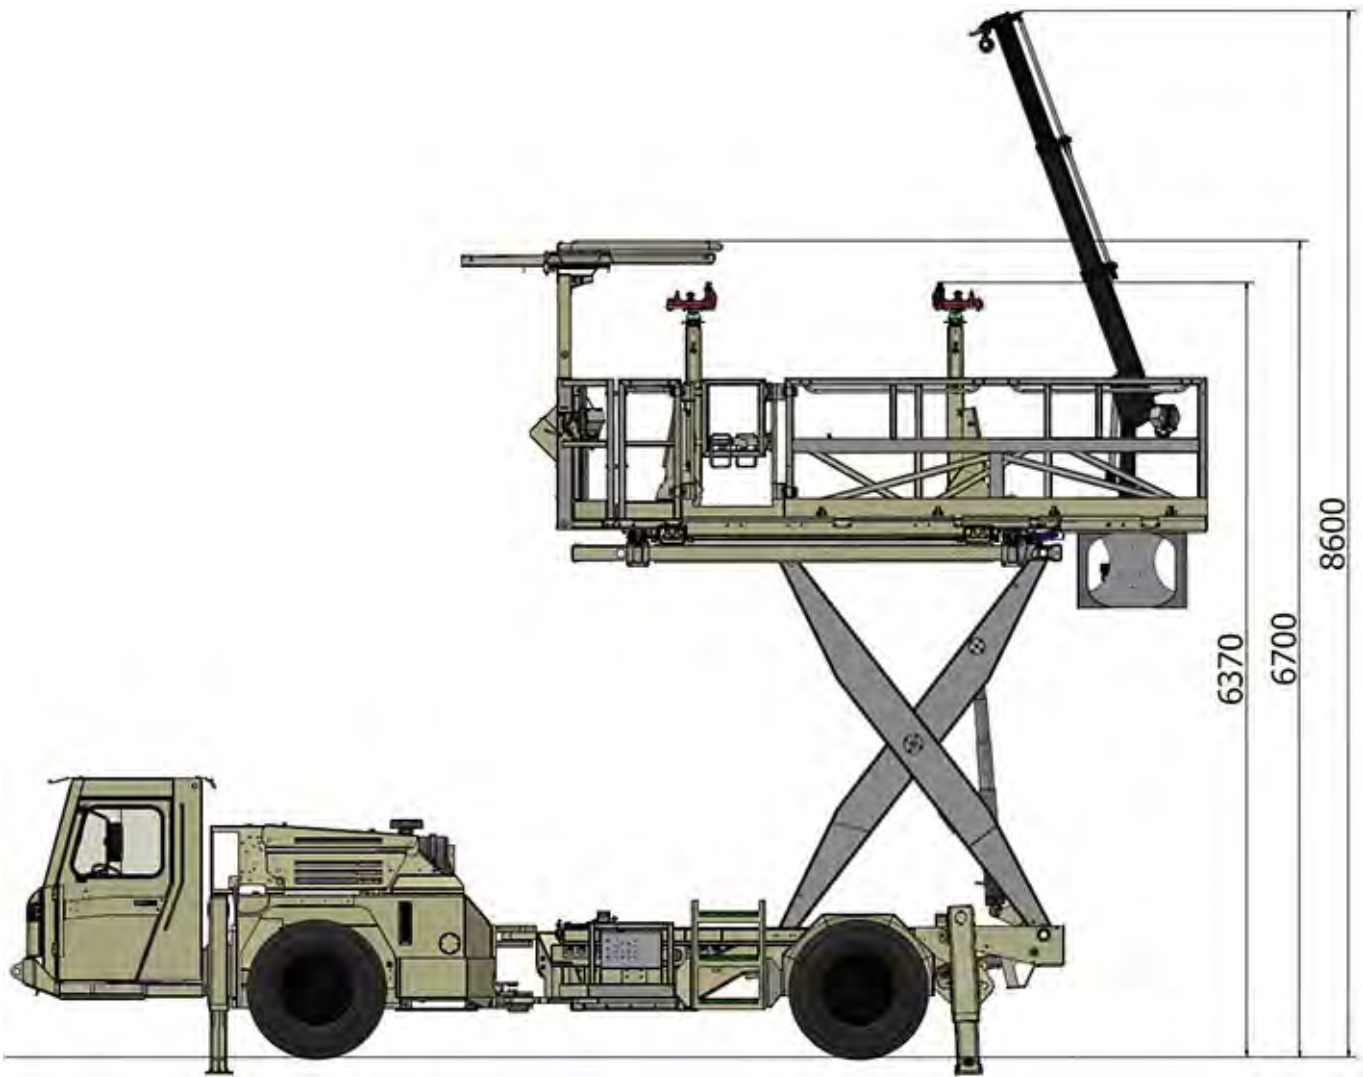


TOP VIEW – 2000 X 4000 PLATFORM

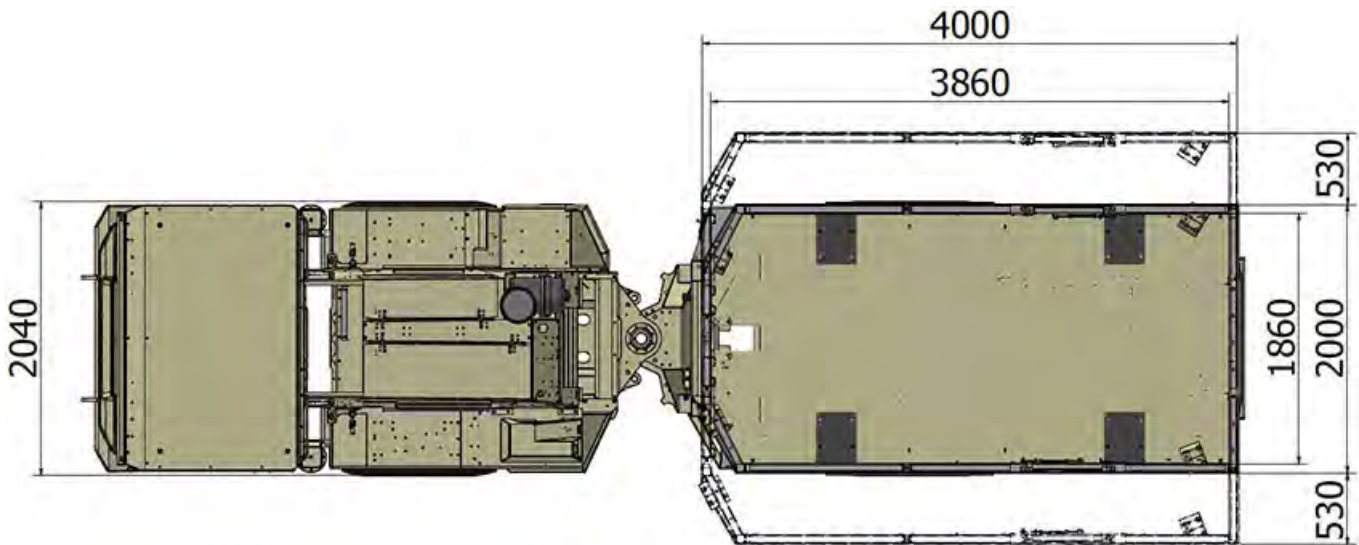


TOP VIEW – 2400 X 4000 PLATFORM

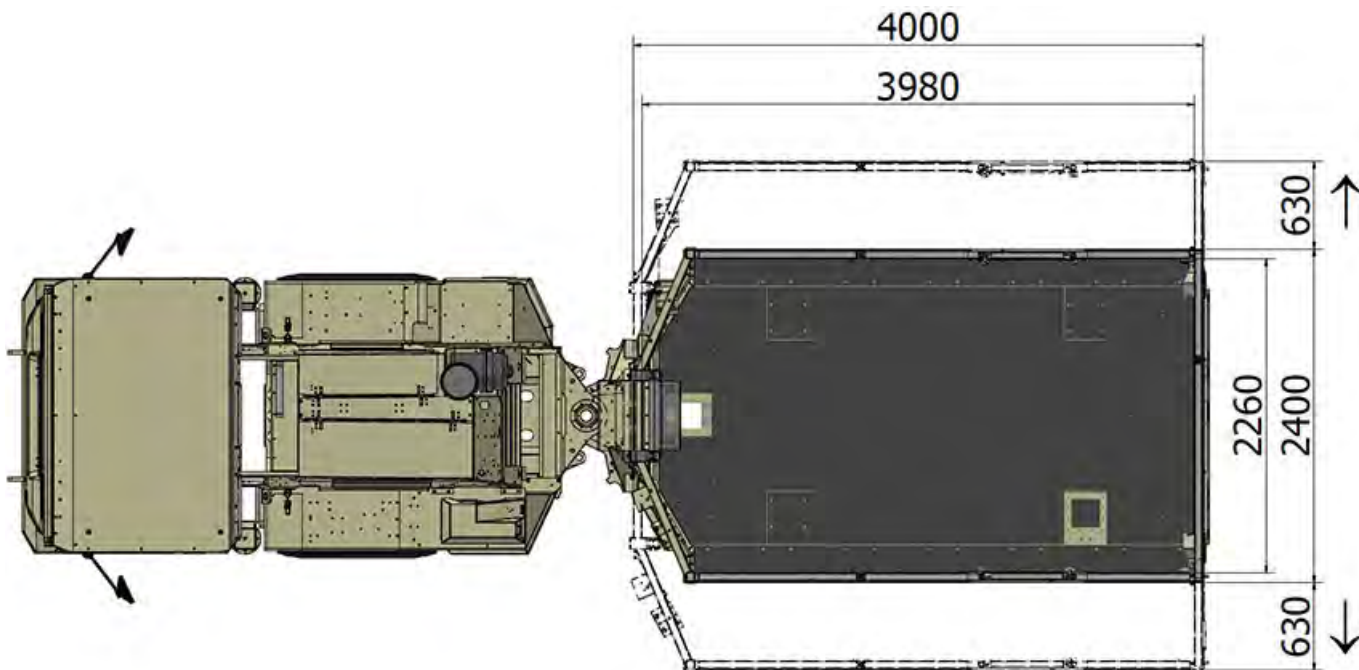


TOP VIEW – 2400 X 5200 PLATFORM

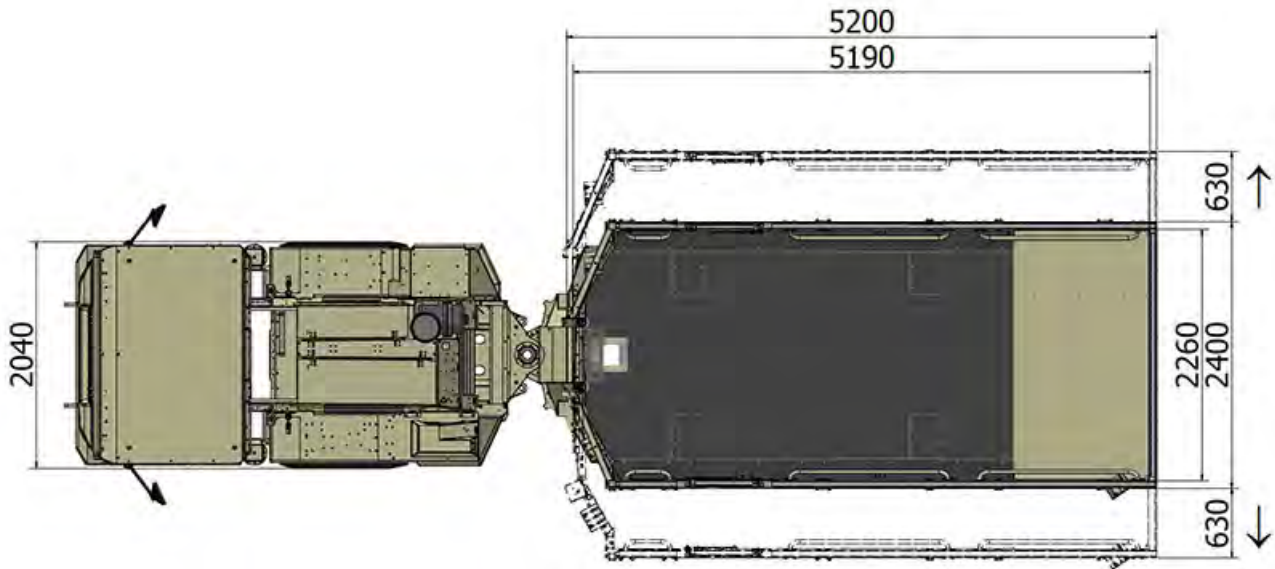

TURNING RADIUS – 2000 X 4000 PLATFORM

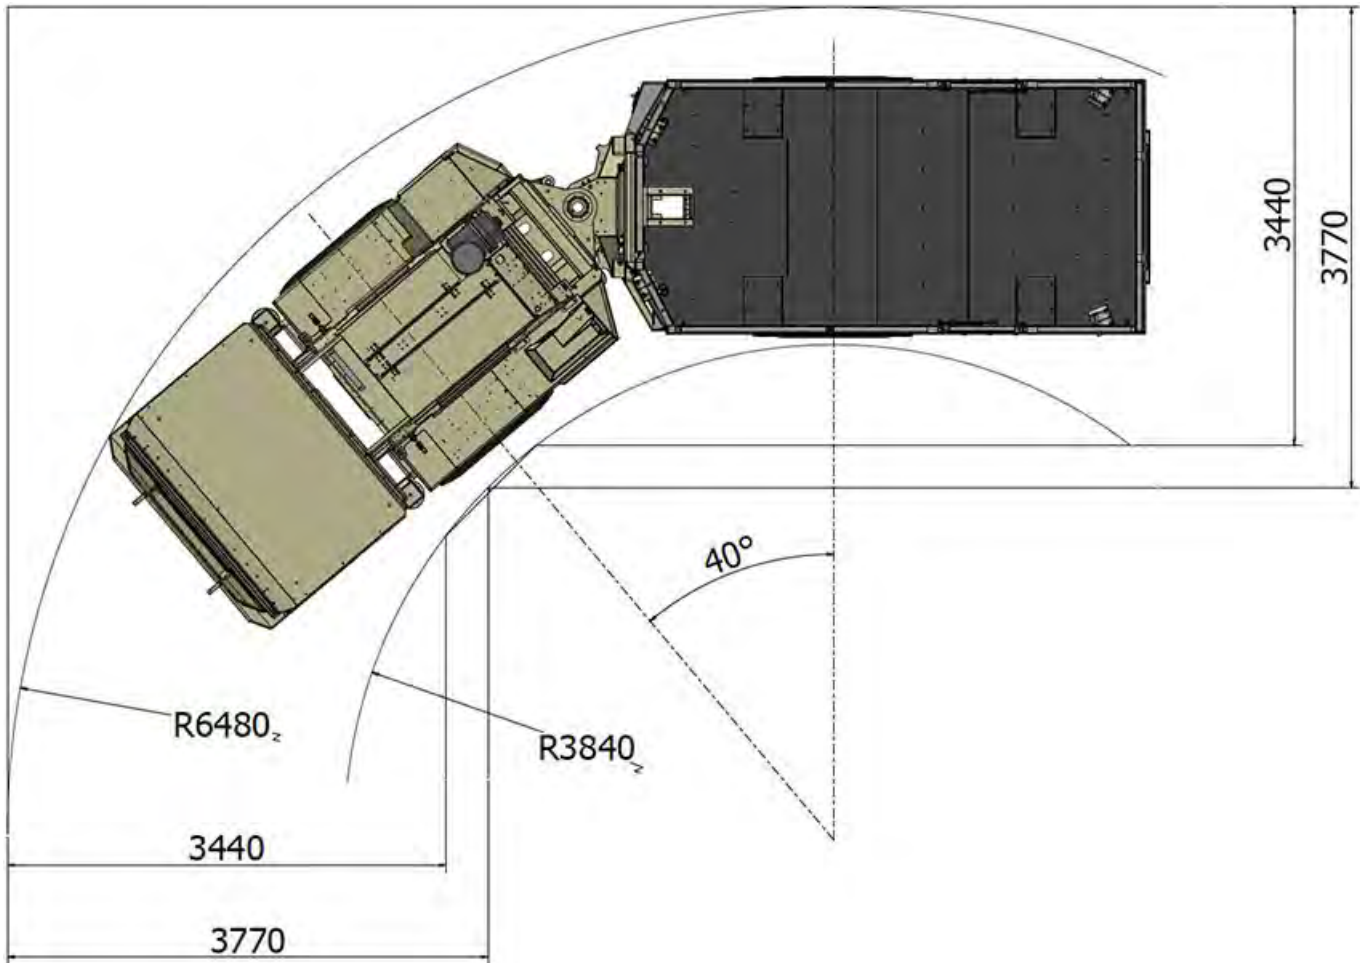


TURNING RADIUS – 2400 X 4000 PLATFORM

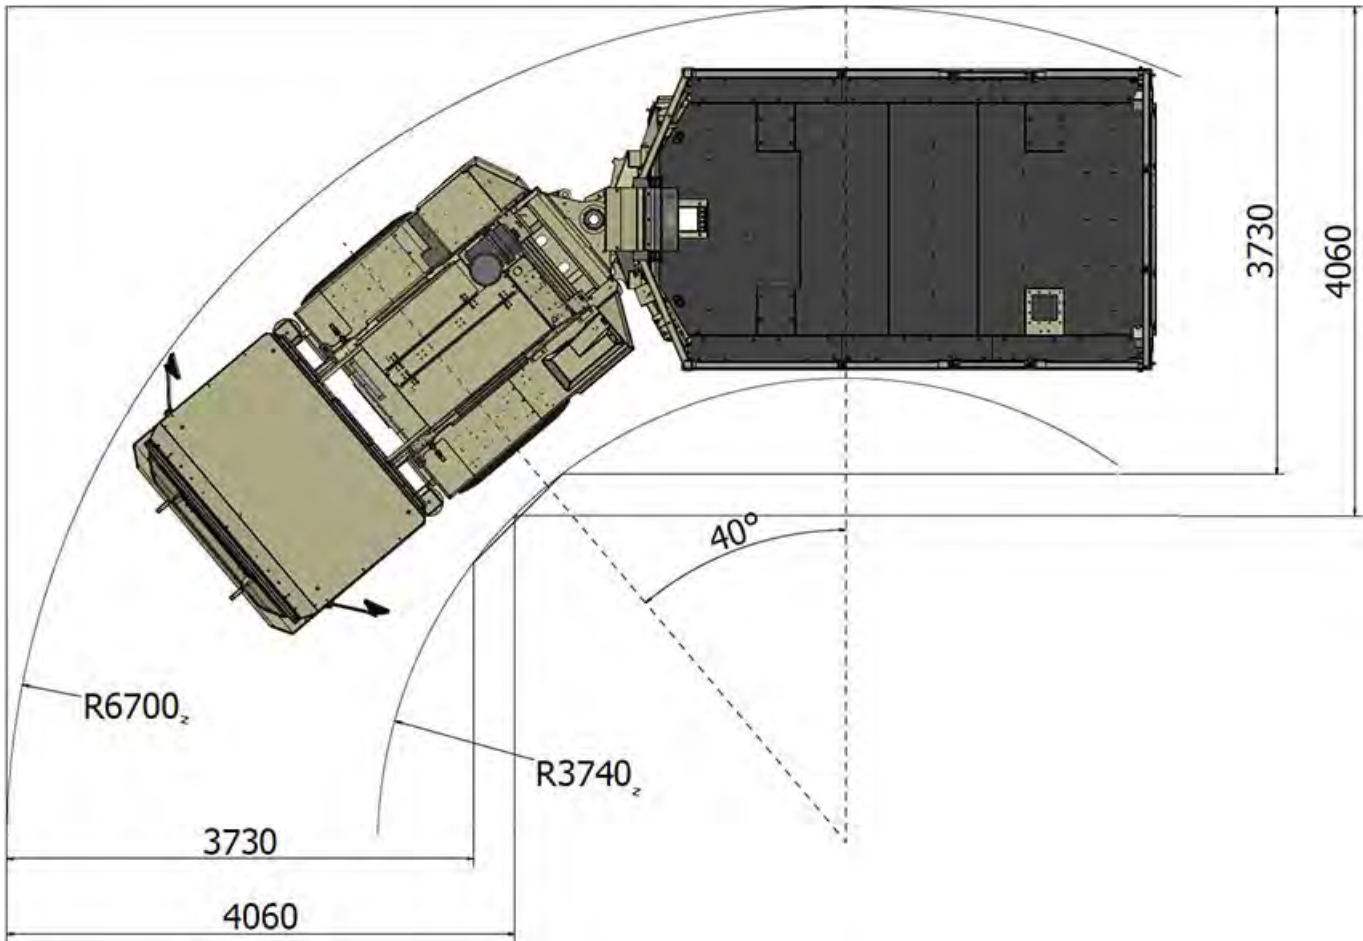

Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.


TURNING RADIUS – 2400 X 5200 PLATFORM

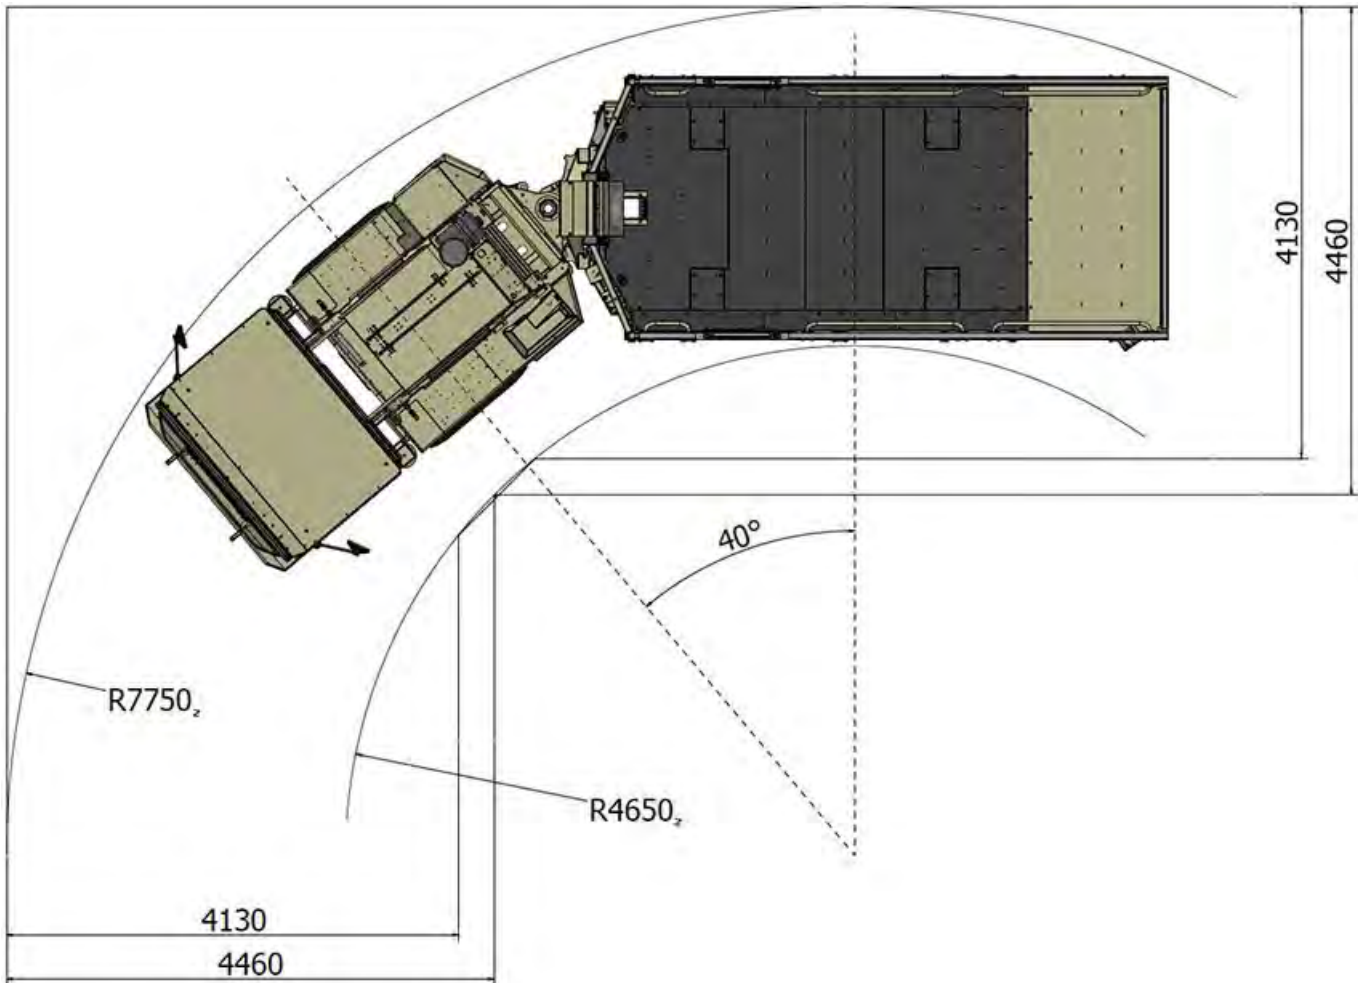


Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.


FRONT VIEW

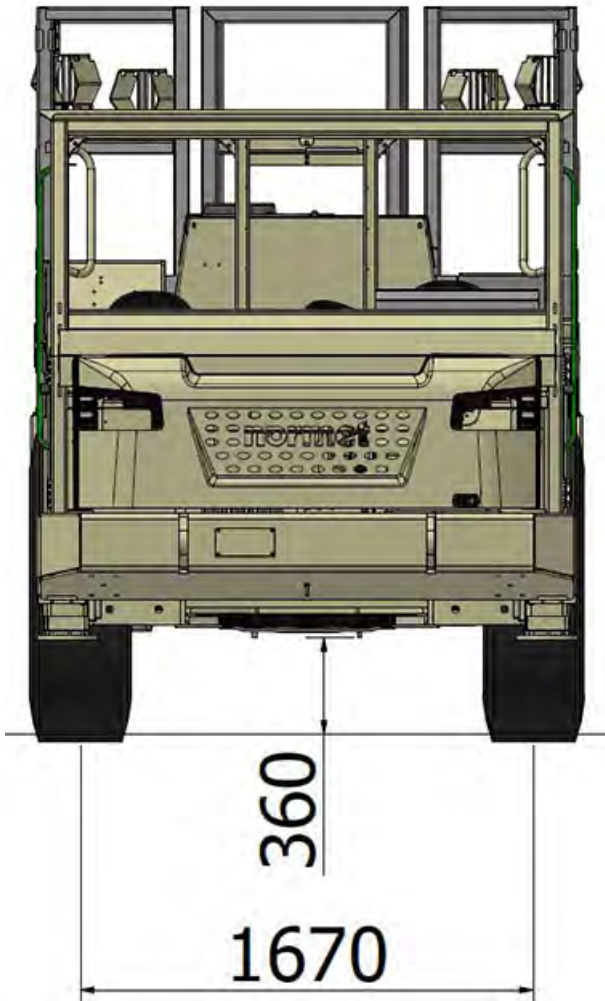

BACK VIEW - CRANE REACH

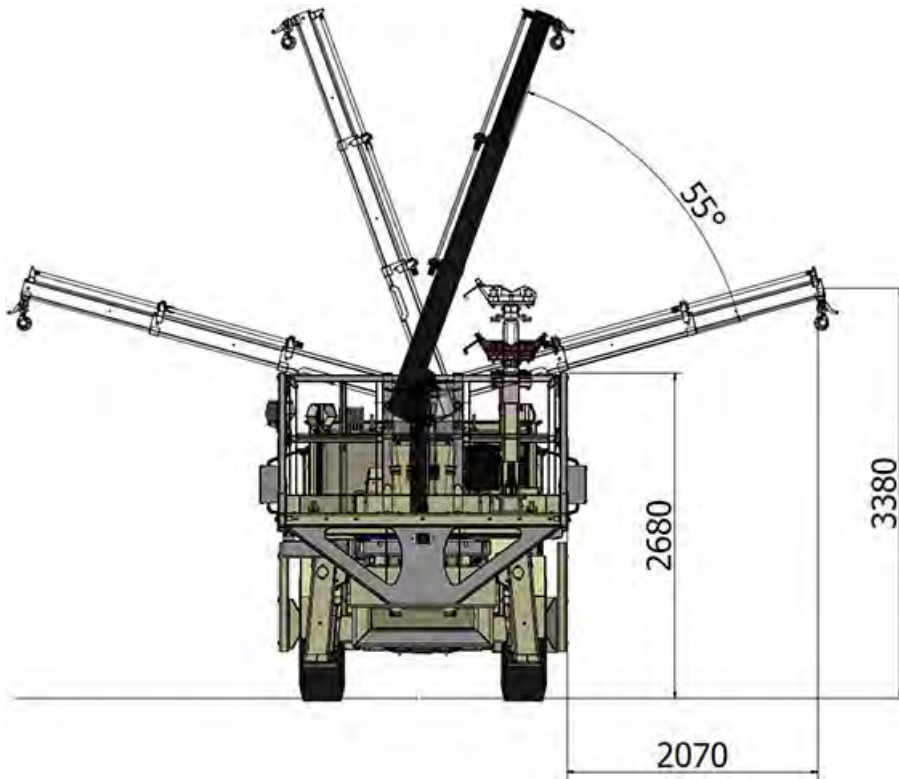

PLATFORM MOUNTED CRANE HIAB 029 LIFTING CAPACITIES

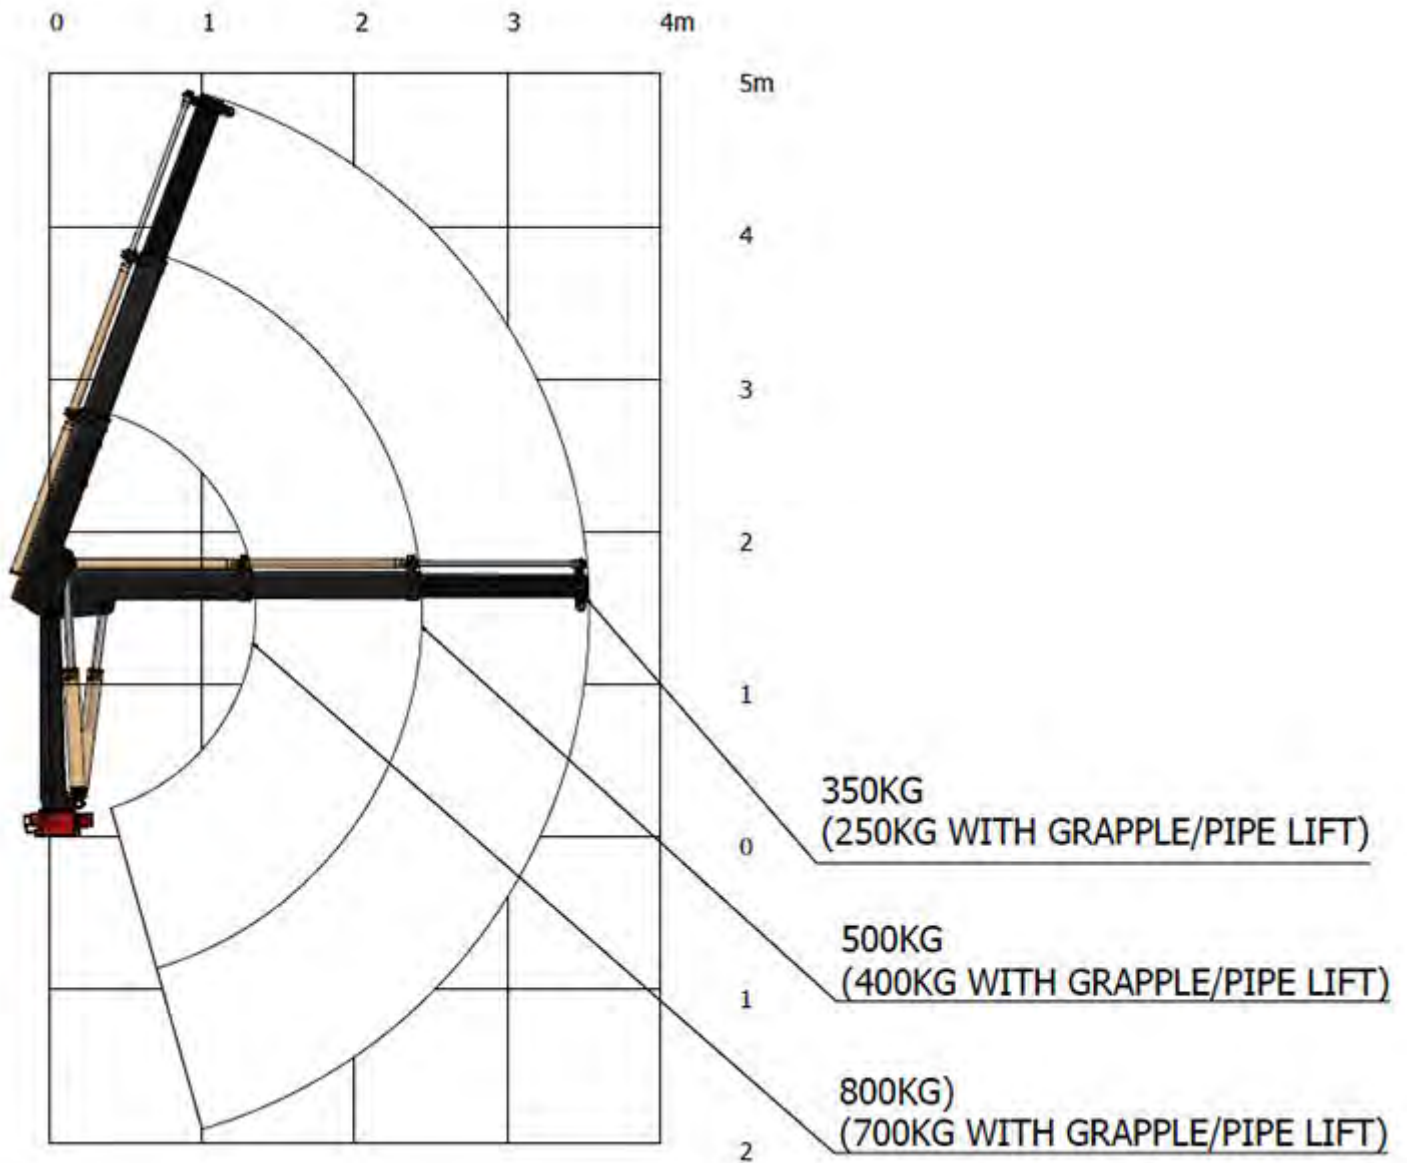

TRACTIVE EFFORTS

OPERATING WEIGHT

Base machine


15 300 kg

final machine weight variate in agree with selected options


DEUTZ TCD 2013 L4, 120 KW

Performance curve DOC060005


Conversion chart

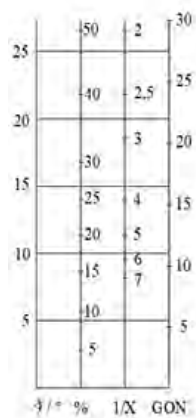

Gradeability kN

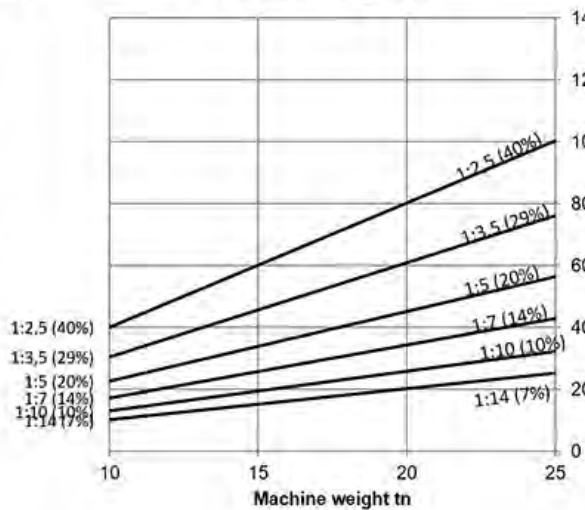


Tractive effort kN

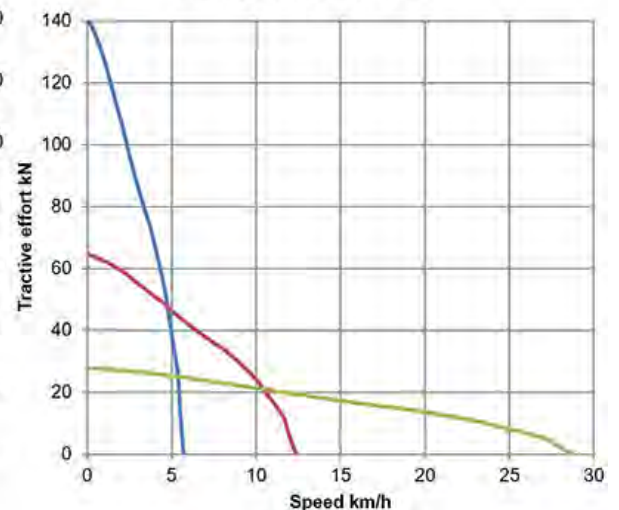


CUMMINS B 4.5 120 KW

Performance curve with lock-up DOC028557


Conversion chart

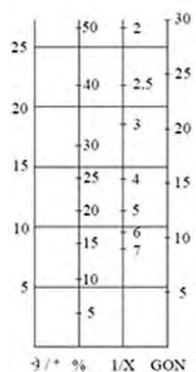

Gradeability kN

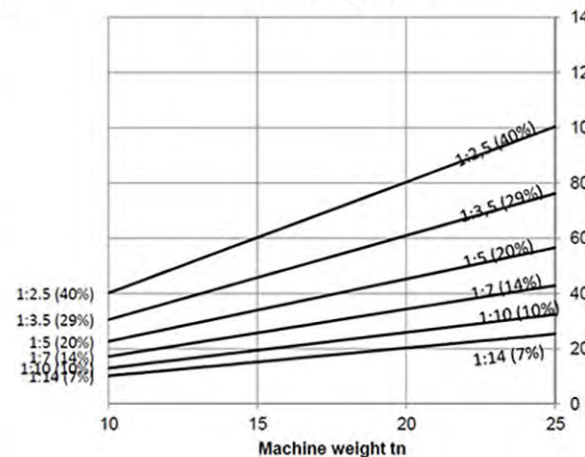

Tractive effort kN

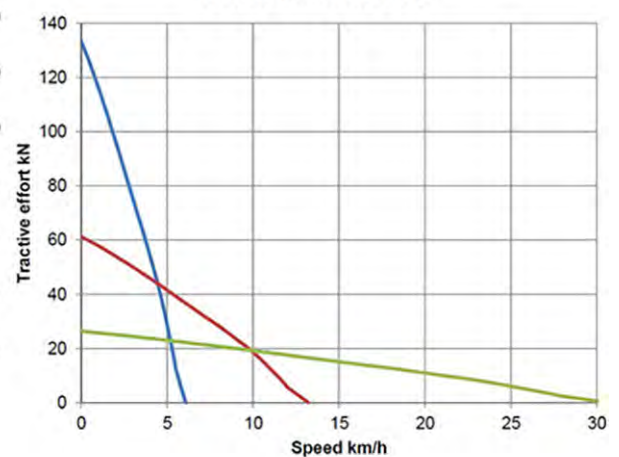

Normet reserves the right to change this specification without further notice

Pictures may include options and additional equipment.