



Juncos

Juncos 1L



Juncos 3L



Juncos 6L



Juncos 9L



Soft Spun

Soft Spun Small



Soft Spun Large



Abajourd'hui

Abajourd'hui Small




Abajourd'hui Large



Juncos Designed By Flos Soft Architecture

Juncos 1L

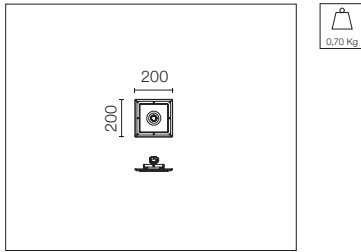


LED-Halbeinbauleuchte für Innenräume. In Verbindung mit der Soft Architecture Technologie integriert sie sich perfekt in den Architekturraum. Ohne Netzgerät. Siehe Treiber auf der nächsten Seite.

Semi-recessed LED luminaire for indoor applications. Seamless integration in the architectural environment by Soft Architecture technology. Power supply not included. See driver in next page.

Produkt mit Vorverkabelung zum Anschluss an Konstantstrom.

Pre-wired product to be connected to constant current.


Juncos 3L

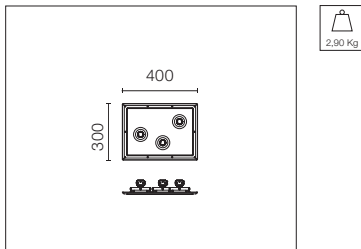

Produkt mit Reihenschaltung-Vorverkabelung zum Anschluss an Konstantstrom.

Pre-wired product for serial connection to constant current.



Juncos 6L

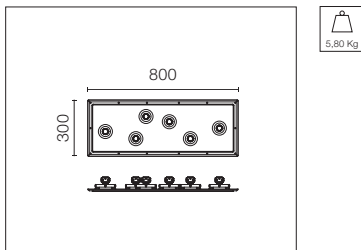

Produkt mit Reihenschaltung-Vorverkabelung zum Anschluss an Konstantstrom.

Pre-wired product for serial connection to constant current.

Juncos 9L

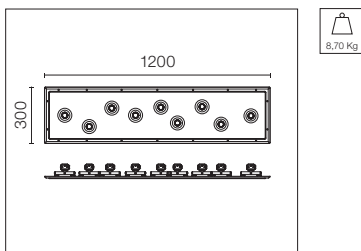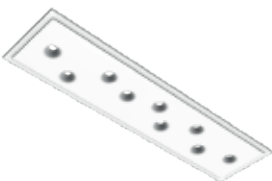

Produkt mit Reihenschaltung-Vorverkabelung zum Anschluss an Konstantstrom.

Pre-wired product for serial connection to constant current.

Soft Platte / Soft Plate

Juncos 1L

SA.5200.5.120

Juncos 3L

SA.5201.5.120

Juncos 6L



SA.5202.5.120

Juncos 9L

SA.5203.5.120

Junco 250 mm



Light Source: Power LED DC 700 mA - 2,1W - 216 lm - 3000K/CRI 80 / 2,1W - 182 lm- 2700K/CRI 90

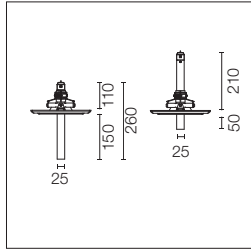

Vielseitige Leuchte. Individuell ausrichtbar und regulierbare Einbautiefe. Erhältlich in Schwarz, Weiß und Chrom.
Produkte zur Netzdimmung – Lesen Sie bitte den Haftungsausschluss zur Netzdimmung im Kapitel „Treiber“.


Luminaire that offers many possibilities. Can be individually focused and their recessed height is adjustable. Available in a black, white and chrome finish.
Mains Dimming Products – Please read Mains Dimming disclaimer in drivers chapter.

Junco 400 mm

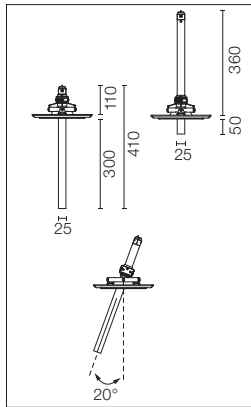

Junco 250 mm 2700K

- 08.8595.40A
- 08.8595.06A
- 08.8595.AAA




Beam Angle: 15°

h(m)	E(lx)	D(m)
1	1443	0.27
2	361	0.53
3	160	0.80
4	90	1.07
5	58	1.34

Luminous flux luminaire 130 lm

3000K

- 08.8590.40A
- 08.8590.06A
- 08.8590.AAA




Beam Angle: 15°

h(m)	E(lx)	D(m)
1	1919	0.27
2	480	0.53
3	213	0.80
4	120	1.07
5	77	1.34

Luminous flux luminaire 173 lm

Junco 400 mm 2700K

- 08.8596.40A
- 08.8596.06A
- 08.8596.AAA




Beam Angle: 15°

h(m)	E(lx)	D(m)
1	1443	0.27
2	361	0.53
3	160	0.80
4	90	1.07
5	58	1.34

Luminous flux luminaire 130 lm

3000K

- 08.8591.40A
- 08.8591.06A
- 08.8591.AAA



Beam Angle: 15°

h(m)	E(lx)	D(m)
1	1919	0.27
2	480	0.53
3	213	0.80
4	120	1.07
5	77	1.34

Luminous flux luminaire 173 lm

Treiber für die serielle Verbindung / Drivers for Serial Connection

DIM Protocol	1L	3L	6L	9L
Non Dimmable			60.9592	
Non Dimmable			60.9408	
Non Dimmable - UL			60.8911	
Dimmable 1-10V - Push - UL		60.9188		-
Dimmable Dali		60.9222		
Casambi	-	60.9716	60.9716	60.9716
Mains Dimming	60.9379	60.9379	60.9692	60.9692

* Siehe Treiberkapitel / Refer to the Drivers chapter



Maximale entfernung des LED-geräts / Max. distance from LED driver

Konstantstromgerät / constant current driver (700ma)

Entfernung / Distance	10 m	20 m	50 m
Kabelquerschnitt / Cable section	0,5mm ²	1mm ²	2,5mm ²

Soft Spun Halogen Small Designed By Sebastian Wrong

Light Source: LED QT-DE-12 1xR7s (78 mm)

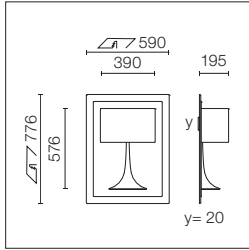

Einbauleuchte für Netzspannung für LED-Retrofit-Lampe.

Recessed luminaire with main voltage source for LED Retrofit lamp.



Siehe Katalog Flos Decorative Collection.

See Flos Decorative Collection catalogue.

SA.5005.1

Soft Spun Halogen Large Designed By Sebastian Wrong

Light Source: LED QT-DE-12 1xR7s (diffuser) (118 mm) / LED White 1,4W - 80 lm - 3000K/CRI>90 (base)

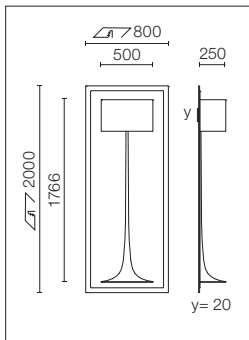

Einbauleuchte für Netzspannung für LED-Retrofit-Lampe. Elektronischer LED-Treiber 220 - 240 V / 50 - 60 Hz integriert.

Recessed luminaire with main voltage source for LED Retrofit lamp. Electronic LED driver 220-240V / 50-60Hz integrated.



Siehe Katalog Flos Decorative Collection.

See Flos Decorative Collection catalogue.

SA.5009.1

Soft Spun LED Small Designed By Sebastian Wrong

Light Source: LED White 35W - 1800 lm - 3000K/CRI 90

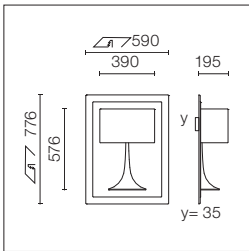

Einbauleuchte für LED-Lampe. Netzteil 220/240V ohne Dimmer eingeschlossen.

Recessed luminaire for LED lamp. Non-dimmable 220/240V power supply included.



Siehe Katalog Flos Decorative Collection.

See Flos Decorative Collection catalogue.

SA.5006.1F

Soft Spun LED Large Designed By Sebastian Wrong

Light Source: LED White 35W - 1800 lm - 3000K/CRI 90 (diffuser) / LED White 1,4W - 80 lm - 2700K/CRI>90 (base)

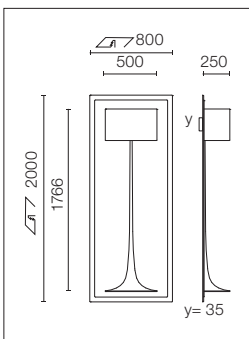

Einbauleuchte für LED-Lampe. Netzteil 220/240V ohne Dimmer eingeschlossen.

Recessed luminaire for LED lamp. Non-dimmable 220/240V power supply included.



Siehe Katalog Flos Decorative Collection.

See Flos Decorative Collection catalogue.

SA.5007.1F

Abajourd'hui Small Designed By Flos Soft Architecture

Light Source: QT-32 E27 - max 75W

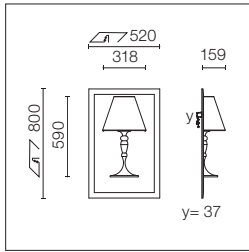

Einbauleuchte mit direktem Netzanschluss. Ausgeschlossene Lichtquelle. Muss separat bestellt werden.

Recessed luminaire with direct connection to mains. Excluded light source. To be ordered separately.



Siehe Katalog Flos Decorative Collection.

See Flos Decorative Collection catalogue.

SA.5001.1

Abajourd'hui Large Designed By Flos Soft Architecture

Light Source: QT-32 E27 - max 150W

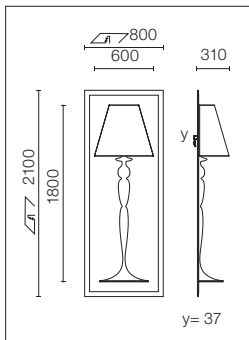

Einbauleuchte mit direktem Netzanschluss.

Recessed luminaire with direct connection to mains.

Siehe Katalog Flos Decorative Collection.

See Flos Decorative Collection catalogue.

SA.5000.1

