



Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Description


Zero Track Pro stands out with its ease of installation on surfaces, as well as with its minimized dimensions and minimalist aesthetics where, once integrated into the space, the eye cannot tell whether the line of the profile is on the surface or recessed into the ceiling/wall instead.

Its reduced dimensions also hold the technology to control adjustment with protocols that allow professional management of appliances through data paths or wirelessly (either in broadcast mode or individually, point to point).




Recessed Installation

Recessed Reinforced

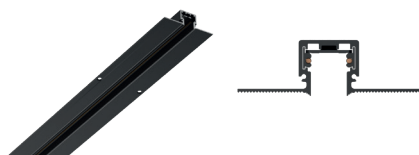

Light Modules

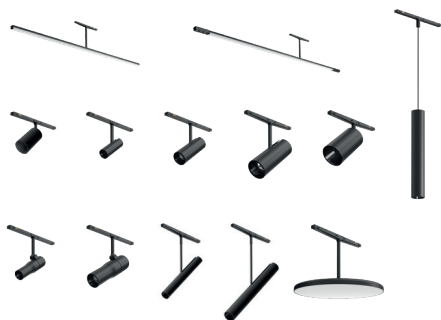

Certifications



Class 2

Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.

Lamp

System Lamp Type	LED
Color Temperature	2700K, 3000K
Color Rendering	CRI90
Application	General Lighting

Physical

Material	Aluminum
Ingress Protection Rating	IP20
Finishes	■ 14 = Black
Installation type	Recessed
Environment	Indoor
Field cuttable	Yes

Electrical & Control

Driver location	Remote
Driver Input Voltage	120V-277V
Driver Output Voltage	24V
Control	Non Dimmable / Dali / 1-10V / Casambi



Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Notes

Wattage per linear foot is dependent upon quantity and type of light modules used.

Contractor to supply wire from driver to luminaire. Drivers should be installed in a suitable electrical enclosure (by others), and an accessible location.

Remote power supply

0-10V dimming control unit is not included. Compatible dimmers to be used must be "active 0-10V" or employ the Dim Control Unit (DCU).


The maximum length that can be fed with a single 96W driver is 19'-6", however voltage drop may limit actual lengths to shorter runs. Consult factory for specific application assistance.

3500K and other CCTs are available but not cataloged. Consult factory.




Recessed Installation

Recessed Reinforced

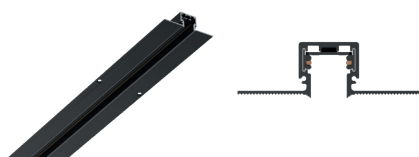

Light Modules

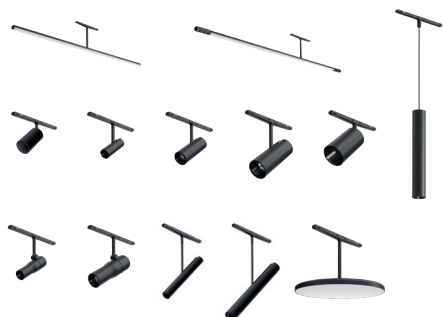

Certifications



Class 2


Photometrics

For current IES files please visit arch.flosusa.com

Warranty

2 years from date of sale.

Installation

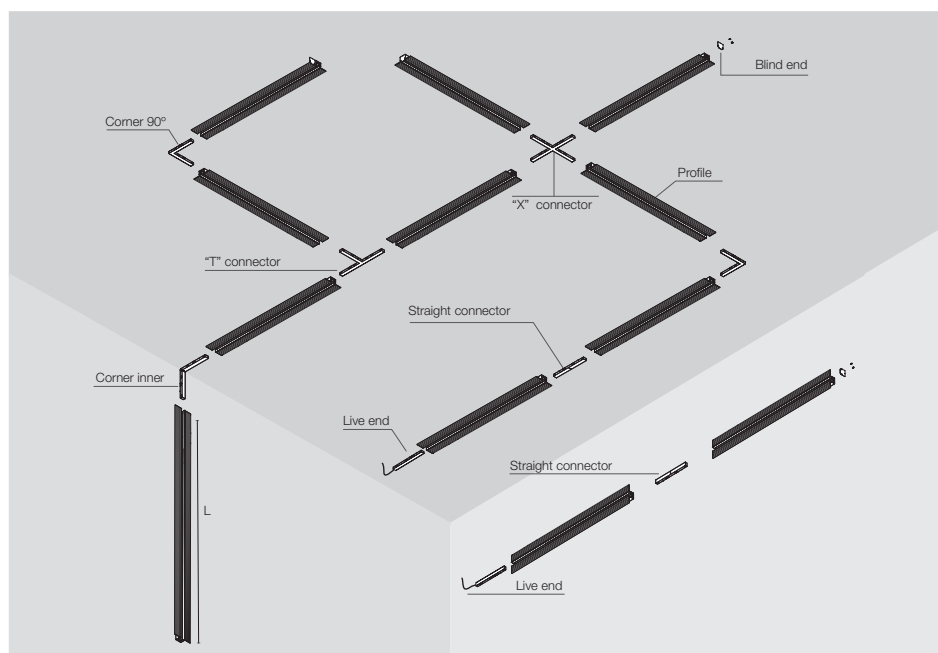

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Profiles

Interior electromechanical profile (24Vdc) from 1 to 3m long for wall or ceiling installation, fastened with special screws and plugs provided with the profile. Request power connectors, intermediate connectors and covers separately. Feed unit joints available in the form of L, T and X in the same plane. It also has a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall). Aesthetic covers for the inner profile gap available as an option.

39.4" [1 m] Profile	78.7" [2 m] Profile	118.1" [3 m] Profile
Part Number: <div> Dimmable Non Dimmable </div> <div> 06.0450.14 06.0453.14 </div>	Part Number: <div> Dimmable Non Dimmable </div> <div> 06.0451.14 06.0454.14 </div>	Part Number: <div> Dimmable Non Dimmable </div> <div> 06.0452.14 06.0455.14 </div>

Zero Track Pro Recessed


High-tech LED lighting system for interior architecture

Power Supply

LED Driver, 24VDC, 60W, Non-Dimming,
120-277V

Part Number:


LEDSB60W24V-NDM-D1



LED Driver, 24VDC, 96W, Non-Dimming,
120-277V

Part Number:

LEDSB96W24V-NDM-D1




Dimming controllers

Dimming Control Unit Box 24V - 48V
0-10V Required for a 0-10V Dimming
installation. 1 Dimming control can
control up to 20 fixtures

Part Number:

■ 08.0613.14A

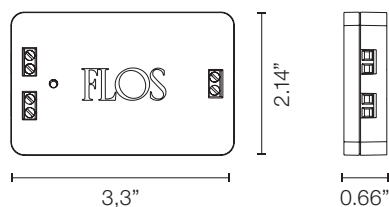

Zero Track Pro Recessed


High-tech LED lighting system for interior architecture

Connectors

Live End Feed
Feed Unit for remote power supply unit.
Power cable inserting rear only. Access
from above required.

Part Number:


■ 06.0456.14

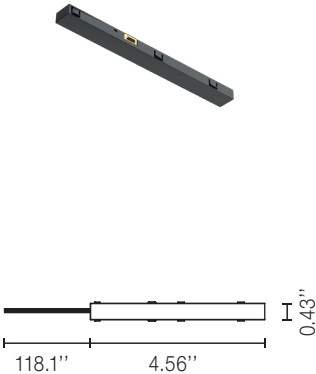

T Connector
T-shaped connector with no feed entry.

Part Number:

■ 06.0459.14.90

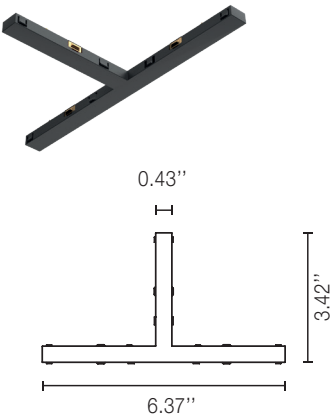

X Connector
Cross-shaped connector with no feed
entry.

Part Number:


■ 06.0460.14.90



Straight Connector
Intermediate connector with no feed entry.

Part Number:

06.2608.14



Zero Track Pro Recessed


High-tech LED lighting system for interior architecture

Corners

90° Corner
90° flat corner with no feed entry.

Part Number:


06.0457.14



Inner Corner
Ceiling/wall - wall/wall inner corner with no feed entry.

Part Number:

06.0458.14

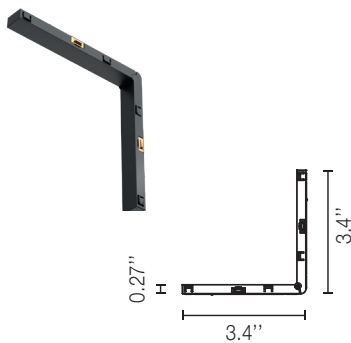


Accessories

Blind End
End Cap. 2 unit kit.

Part Number:

06.0461.14



Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Find Me 0 - Designed by Jorge Herrera

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play). Accessories included (honeycomb grid and protection bar).

Technical specifications and product details for FLOS Zero Track Pro Recessed lighting fixtures. Includes dimensions, finish options, and photometric data.

• Non Dimmable
• CB = Casambi

• DA = Dali
• 1V = 1-10V

40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700	90	276	169	3.5W	15°	05.5100	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	Beam Angle: 15° Luminous flux luminaire 169 lm
3000	90	302	183	3.5W	15°	05.5105	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	Beam Angle: 15° Luminous flux luminaire 183 lm
2700	90	276	179	3.5W	25°	05.5101	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	Beam Angle: 25° Luminous flux luminaire 179 lm
3000	90	302	194	3.5W	25°	05.5106	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	Beam Angle: 25° Luminous flux luminaire 194 lm

The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Find Me 1 - Designed by Jorge Herrera

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play). Accessories included (honeycomb grid and protection bar).

Technical drawing showing dimensions and color options (40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze) for the Zero Track Pro Recessed fixture.

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700	90	432	309	5.5W	14°	05.5110	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	Non Dimmable DA = Dali 1V = 1-10V CB = Casambi	14° beam spread diagram and table
3000	90	446	314	5.5W	14°	05.5115	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	Non Dimmable DA = Dali 1V = 1-10V CB = Casambi	14° beam spread diagram and table
2700	90	432	284	5.5W	20°	05.5111	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	Non Dimmable DA = Dali 1V = 1-10V CB = Casambi	20° beam spread diagram and table
3000	90	446	289	5.5W	20°	05.5116	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	Non Dimmable DA = Dali 1V = 1-10V CB = Casambi	20° beam spread diagram and table


The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Find Me 2 - Designed by Jorge Herrera

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play). Accessories included (honeycomb grid and protection bar).

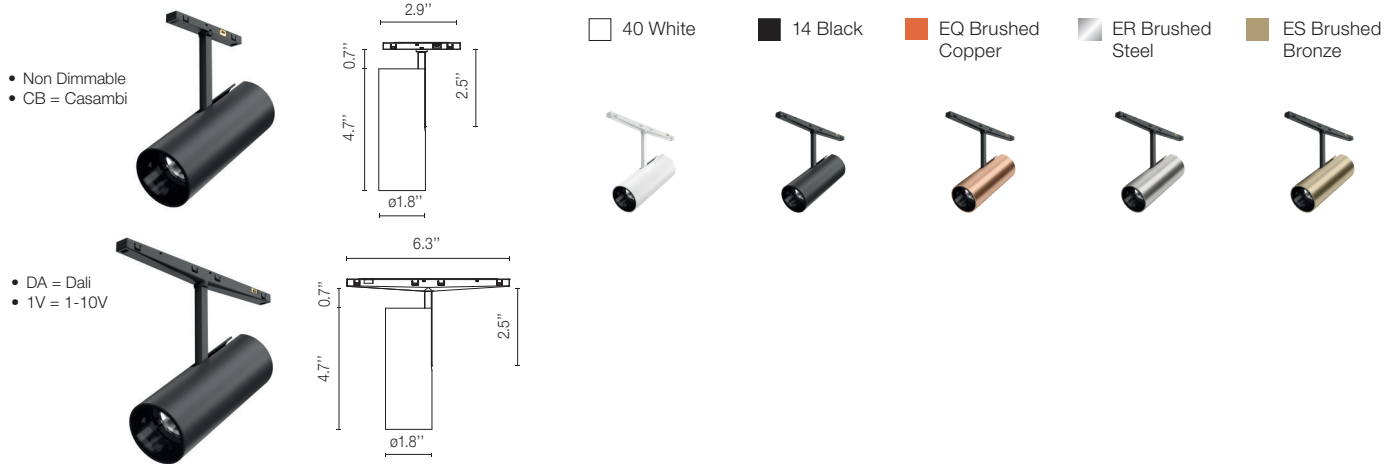

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric																	
2700	90	724	479	10.5W	10°	05.5120	<div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> <div><div><div></div>• Non Dimmable</div><div><div></div>• DA = Dali</div><div><div></div>• 1V = 1-10V</div><div><div></div>• CB = Casambi</div></div> <td><div><div><div></div>10°</div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>0°</div><div>30°</div><div>60°</div><div>90°</div></div><div>7243 cd</div><div>Luminous flux luminaire 479 lm</div></div><div><div><div></div>10°</div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>0°</div><div>30°</div><div>60°</div><div>90°</div></div><div>10246 cd</div><div>Luminous flux luminaire 531 lm</div></div><div>Beam Angle: 10°<table><tr><th>h(m)</th><th>E(h)</th><th>D(m)</th></tr><tr><td>1</td><td>9243</td><td>3.18</td></tr><tr><td>2</td><td>2311</td><td>3.35</td></tr><tr><td>3</td><td>1027</td><td>3.53</td></tr><tr><td>4</td><td>578</td><td>3.70</td></tr><tr><td>5</td><td>370</td><td>3.88</td></tr></table></div></td>	<div><div><div></div>10°</div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>0°</div><div>30°</div><div>60°</div><div>90°</div></div><div>7243 cd</div><div>Luminous flux luminaire 479 lm</div></div> <div><div><div></div>10°</div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>0°</div><div>30°</div><div>60°</div><div>90°</div></div><div>10246 cd</div><div>Luminous flux luminaire 531 lm</div></div> <div>Beam Angle: 10°<table><tr><th>h(m)</th><th>E(h)</th><th>D(m)</th></tr><tr><td>1</td><td>9243</td><td>3.18</td></tr><tr><td>2</td><td>2311</td><td>3.35</td></tr><tr><td>3</td><td>1027</td><td>3.53</td></tr><tr><td>4</td><td>578</td><td>3.70</td></tr><tr><td>5</td><td>370</td><td>3.88</td></tr></table></div>	h(m)	E(h)	D(m)	1	9243	3.18	2	2311	3.35	3	1027	3.53	4	578	3.70	5	370	3.88
h(m)	E(h)	D(m)																								
1	9243	3.18																								
2	2311	3.35																								
3	1027	3.53																								
4	578	3.70																								
5	370	3.88																								
3000	90	781	531	10.5W	10°	05.5125																				
2700	90	724	441	10.5W	19°	05.5121	<div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> <div><div><div></div>• Non Dimmable</div><div><div></div>• DA = Dali</div><div><div></div>• 1V = 1-10V</div><div><div></div>• CB = Casambi</div></div> <td><div><div><div></div>19°</div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>0°</div><div>30°</div><div>60°</div><div>90°</div></div><div>1989 cd</div><div>Luminous flux luminaire 441 lm</div></div><div><div><div></div>19°</div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>0°</div><div>30°</div><div>60°</div><div>90°</div></div><div>2206 cd</div><div>Luminous flux luminaire 489 lm</div></div><div>Beam Angle: 19°<table><tr><th>h(m)</th><th>E(h)</th><th>D(m)</th></tr><tr><td>1</td><td>1989</td><td>3.34</td></tr><tr><td>2</td><td>497</td><td>3.67</td></tr><tr><td>3</td><td>221</td><td>4.01</td></tr><tr><td>4</td><td>124</td><td>4.34</td></tr><tr><td>5</td><td>80</td><td>4.68</td></tr></table></div></td>	<div><div><div></div>19°</div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>0°</div><div>30°</div><div>60°</div><div>90°</div></div><div>1989 cd</div><div>Luminous flux luminaire 441 lm</div></div> <div><div><div></div>19°</div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>0°</div><div>30°</div><div>60°</div><div>90°</div></div><div>2206 cd</div><div>Luminous flux luminaire 489 lm</div></div> <div>Beam Angle: 19°<table><tr><th>h(m)</th><th>E(h)</th><th>D(m)</th></tr><tr><td>1</td><td>1989</td><td>3.34</td></tr><tr><td>2</td><td>497</td><td>3.67</td></tr><tr><td>3</td><td>221</td><td>4.01</td></tr><tr><td>4</td><td>124</td><td>4.34</td></tr><tr><td>5</td><td>80</td><td>4.68</td></tr></table></div>	h(m)	E(h)	D(m)	1	1989	3.34	2	497	3.67	3	221	4.01	4	124	4.34	5	80	4.68
h(m)	E(h)	D(m)																								
1	1989	3.34																								
2	497	3.67																								
3	221	4.01																								
4	124	4.34																								
5	80	4.68																								
3000	90	781	489	10.5W	19°	05.5126																				
2700	90	724	364	10.5W	32°	05.5122	<div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div> <div><div><div></div>• Non Dimmable</div><div><div></div>• DA = Dali</div><div><div></div>• 1V = 1-10V</div><div><div></div>• CB = Casambi</div></div> <td><div><div><div></div>32°</div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>0°</div><div>30°</div><div>60°</div><div>90°</div></div><div>722 cd</div><div>Luminous flux luminaire 364 lm</div></div><div><div><div></div>32°</div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>0°</div><div>30°</div><div>60°</div><div>90°</div></div><div>801 cd</div><div>Luminous flux luminaire 404 lm</div></div><div>Beam Angle: 32°<table><tr><th>h(m)</th><th>E(h)</th><th>D(m)</th></tr><tr><td>1</td><td>722</td><td>3.57</td></tr><tr><td>2</td><td>180</td><td>4.15</td></tr><tr><td>3</td><td>80</td><td>4.72</td></tr><tr><td>4</td><td>45</td><td>5.29</td></tr><tr><td>5</td><td>29</td><td>5.87</td></tr></table></div></td>	<div><div><div></div>32°</div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>0°</div><div>30°</div><div>60°</div><div>90°</div></div><div>722 cd</div><div>Luminous flux luminaire 364 lm</div></div> <div><div><div></div>32°</div><div><div></div><div>90°</div><div>60°</div><div>30°</div><div>0°</div><div>30°</div><div>60°</div><div>90°</div></div><div>801 cd</div><div>Luminous flux luminaire 404 lm</div></div> <div>Beam Angle: 32°<table><tr><th>h(m)</th><th>E(h)</th><th>D(m)</th></tr><tr><td>1</td><td>722</td><td>3.57</td></tr><tr><td>2</td><td>180</td><td>4.15</td></tr><tr><td>3</td><td>80</td><td>4.72</td></tr><tr><td>4</td><td>45</td><td>5.29</td></tr><tr><td>5</td><td>29</td><td>5.87</td></tr></table></div>	h(m)	E(h)	D(m)	1	722	3.57	2	180	4.15	3	80	4.72	4	45	5.29	5	29	5.87
h(m)	E(h)	D(m)																								
1	722	3.57																								
2	180	4.15																								
3	80	4.72																								
4	45	5.29																								
5	29	5.87																								
3000	90	781	404	10.5W	32°	05.5127																				

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Find Me 1 Suspension - Designed by Jorge Herrera

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play). Accessories included (honeycomb grid and protection bar).

Technical specifications and color options for the Find Me 1 Suspension fixture. Includes dimensions (2.9", 6.3", 118.1", 8.6", ø1.2") and color swatches (40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze).

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700	90	432	309	5.5W	14°	05.5130	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	Non Dimmable DA = Dali 1V = 1-10V CB = Casambi	14° beam spread diagram with luminous flux data (309 lm).
3000	90	446	314	5.5W	14°	05.5135	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	Non Dimmable DA = Dali 1V = 1-10V CB = Casambi	14° beam spread diagram with luminous flux data (314 lm).
2700	90	432	186	5.5W	20°	05.5131	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	Non Dimmable DA = Dali 1V = 1-10V CB = Casambi	20° beam spread diagram with luminous flux data (186 lm).
3000	90	446	193	5.5W	20°	05.5136	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	Non Dimmable DA = Dali 1V = 1-10V CB = Casambi	20° beam spread diagram with luminous flux data (193 lm).


The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Magic Stick - Designed by Jorge Herrera

LED diffuse lighting module for installation in the Zero Track Pro system. Can be adjusted by rotating from its central line. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.

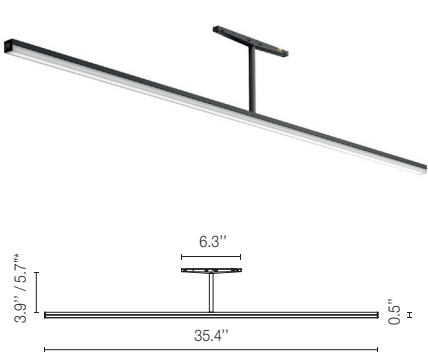

*Custom Rod available

- 40 White
- 14 Black
- EQ Brushed Copper
- ER Brushed Steel
- ES Brushed Bronze



Magic Stick 100

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Rod	Part Number	Finish	Dimming Protocol	Photometric
2700	90	1160	587	10.5W	131° diffuser	3.9"	05.3200	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V	
3000	90	1201	608	10.5W	131° diffuser	3.9"	05.3201	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze		

Magic Stick 145


CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Rod	Part Number	Finish	Dimming Protocol	Photometric
2700	90	1160	587	10.5W	131° diffuser	5.7"	05.3220	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V	
3000	90	1201	608	10.5W	131° diffuser	5.7"	05.3221	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze		

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Magic Stick Asymmetric - Designed by Jorge Herrera

LED diffuse lighting module for installation in the Zero Track Pro system. Can be adjusted by rotating from its central line. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.

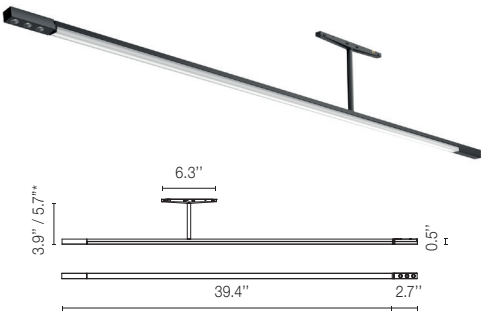









*Custom Rod available

- 40 White
- 14 Black
- EQ Brushed Copper
- ER Brushed Steel
- ES Brushed Bronze



Magic Stick 100 Asymmetric

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Rod	Part Number	Finish	Dimming Protocol	Photometric	
2700	90	1160	587	12W	131° Linear 17° Spot	3.9"	05.3210	<div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div>	<div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div>	<div><div>Spot</div><div><div>Beam Angle: 17° h(m) E(lx) D(m) 1 675 0.29 2 169 0.52 3 75 0.88 4 42 1.18 5 27 1.47 Luminous flux luminaire 136 lm</div></div></div>	<div><div>Linear</div><div><div>Beam Angle: 131° h(m) E(lx) D(m) 1 153 4.3 2 38 8.6 3 17 13.0 4 10 17.3 5 6 21.7 Luminous flux luminaire 587 lm</div></div></div>
								<div><div>Spot</div><div><div>Beam Angle: 17° h(m) E(lx) D(m) 1 698 0.29 2 174 0.59 3 78 0.88 4 44 1.18 5 28 1.47 Luminous flux luminaire 140 lm</div></div></div>		<div><div>Linear</div><div><div>Beam Angle: 131° h(m) E(lx) D(m) 1 158 4.4 2 40 8.8 3 18 13.2 4 10 17.7 5 6 22.2 Luminous flux luminaire 608 lm</div></div></div>	
3000	90	1201	608	12W	131° Linear 17° Spot	3.9"	05.3211	<div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div>		<div><div>Spot</div><div><div>Beam Angle: 17° h(m) E(lx) D(m) 1 698 0.29 2 174 0.59 3 78 0.88 4 44 1.18 5 28 1.47 Luminous flux luminaire 140 lm</div></div></div>	<div><div>Linear</div><div><div>Beam Angle: 131° h(m) E(lx) D(m) 1 158 4.4 2 40 8.8 3 18 13.2 4 10 17.7 5 6 22.2 Luminous flux luminaire 608 lm</div></div></div>
								<div><div>Spot</div><div><div>Beam Angle: 17° h(m) E(lx) D(m) 1 698 0.29 2 174 0.59 3 78 0.88 4 44 1.18 5 28 1.47 Luminous flux luminaire 140 lm</div></div></div>		<div><div>Linear</div><div><div>Beam Angle: 131° h(m) E(lx) D(m) 1 158 4.4 2 40 8.8 3 18 13.2 4 10 17.7 5 6 22.2 Luminous flux luminaire 608 lm</div></div></div>	

• Non Dimmable

• DA = Dali

• 1V = 1-10V

Magic Stick 145 Asymmetric

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Rod	Part Number	Finish	Dimming Protocol	Photometric																																					
2700	90	1160	587	12W	131° Linear 17° Spot	5.7"	05.3230	<div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div>	<div><div>• Non Dimmable</div><div>• DA = Dali</div><div>• 1V = 1-10V</div></div>	<div><div>Spot</div><div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>675</td><td>0.29</td></tr><tr><td>2</td><td>169</td><td>0.59</td></tr><tr><td>3</td><td>75</td><td>0.88</td></tr><tr><td>4</td><td>42</td><td>1.18</td></tr><tr><td>5</td><td>27</td><td>1.47</td></tr></tbody></table><div>Luminous flux luminaire 136 lm</div></div></div>	h(m)	E(lx)	D(m)	1	675	0.29	2	169	0.59	3	75	0.88	4	42	1.18	5	27	1.47	<div><div>Linear</div><div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>153</td><td>4.3</td></tr><tr><td>2</td><td>38</td><td>8.6</td></tr><tr><td>3</td><td>17</td><td>13.0</td></tr><tr><td>4</td><td>10</td><td>17.3</td></tr><tr><td>5</td><td>6</td><td>21.7</td></tr></tbody></table><div>Luminous flux luminaire 587 lm</div></div></div>	h(m)	E(lx)	D(m)	1	153	4.3	2	38	8.6	3	17	13.0	4	10	17.3	5	6	21.7
								h(m)		E(lx)	D(m)																																				
1	675	0.29																																													
2	169	0.59																																													
3	75	0.88																																													
4	42	1.18																																													
5	27	1.47																																													
h(m)	E(lx)	D(m)																																													
1	153	4.3																																													
2	38	8.6																																													
3	17	13.0																																													
4	10	17.3																																													
5	6	21.7																																													
3000	90	1201	608	12W	131° Linear 17° Spot	5.7"	05.3231		<div><div>Spot</div><div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>698</td><td>0.29</td></tr><tr><td>2</td><td>174</td><td>0.59</td></tr><tr><td>3</td><td>78</td><td>0.88</td></tr><tr><td>4</td><td>44</td><td>1.18</td></tr><tr><td>5</td><td>28</td><td>1.47</td></tr></tbody></table><div>Luminous flux luminaire 140 lm</div></div></div>	h(m)	E(lx)	D(m)	1	698	0.29	2	174	0.59	3	78	0.88	4	44	1.18	5	28	1.47	<div><div>Linear</div><div><table><thead><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr></thead><tbody><tr><td>1</td><td>158</td><td>4.3</td></tr><tr><td>2</td><td>40</td><td>8.6</td></tr><tr><td>3</td><td>18</td><td>13.0</td></tr><tr><td>4</td><td>10</td><td>17.3</td></tr><tr><td>5</td><td>6</td><td>21.7</td></tr></tbody></table><div>Luminous flux luminaire 608 lm</div></div></div>	h(m)	E(lx)	D(m)	1	158	4.3	2	40	8.6	3	18	13.0	4	10	17.3	5	6	21.7	
								h(m)	E(lx)	D(m)																																					
1	698	0.29																																													
2	174	0.59																																													
3	78	0.88																																													
4	44	1.18																																													
5	28	1.47																																													
h(m)	E(lx)	D(m)																																													
1	158	4.3																																													
2	40	8.6																																													
3	18	13.0																																													
4	10	17.3																																													
5	6	21.7																																													

• Non Dimmable

• DA = Dali

• 1V = 1-10V

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Atom 90 - Designed by Piero Lissoni

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).

Technical specifications and finish options for the Atom 90 fixture. Includes dimensions (2.9", 1.04", 1.9", 3.5", 6.3", 0.9") and finish choices: 40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze. Also lists control options: Non Dimmable, CB = Casambi, DA = Dali, 1V = 1-10V.

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700	90	432	224	5.5W	14°	05.5140	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	Non Dimmable, DA = Dali 2, 1V = 1-10V, CB = Casambi	Beam Angle: 14° Luminous flux luminaire 224 lm
3000	90	446	247	5.5W	14°	05.5145	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	Non Dimmable, DA = Dali 2, 1V = 1-10V, CB = Casambi	Beam Angle: 14° Luminous flux luminaire 247 lm
2700	90	432	261	5.5W	25°	05.5141	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	Non Dimmable, DA = Dali 2, 1V = 1-10V, CB = Casambi	Beam Angle: 25° Luminous flux luminaire 261 lm
3000	90	446	289	5.5W	25°	05.5146	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	Non Dimmable, DA = Dali 2, 1V = 1-10V, CB = Casambi	Beam Angle: 25° Luminous flux luminaire 289 lm

The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Atom 120 - Designed by Piero Lissoni

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).

Technical drawing showing dimensions and color options for the Atom 120 fixture. Dimensions include 2.9", 0.6", 1.9", 4.8", 6.3", and 1.2". Color options are 40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, and ES Brushed Bronze. Notes include 'Non Dimmable', 'CB = Casambi', 'DA = Dali', and '1V = 1-10V'.

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700	90	600	433	8W	14°	05.5150	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali 2 • 1V = 1-10V • CB = Casambi	14° Beam Angle: 14° Luminous flux luminaire 433 lm
3000	90	648	440	8W	14°	05.5155	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali 2 • 1V = 1-10V • CB = Casambi	14° Beam Angle: 14° Luminous flux luminaire 440 lm
2700	90	600	364	8W	20°	05.5151	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali 2 • 1V = 1-10V • CB = Casambi	20° Beam Angle: 20° Luminous flux luminaire 364 lm
3000	90	648	373	8W	20°	05.5156	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali 2 • 1V = 1-10V • CB = Casambi	20° Beam Angle: 20° Luminous flux luminaire 373 lm


The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.





Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Atom 200 - Designed by Piero Lissoni

LED general lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).

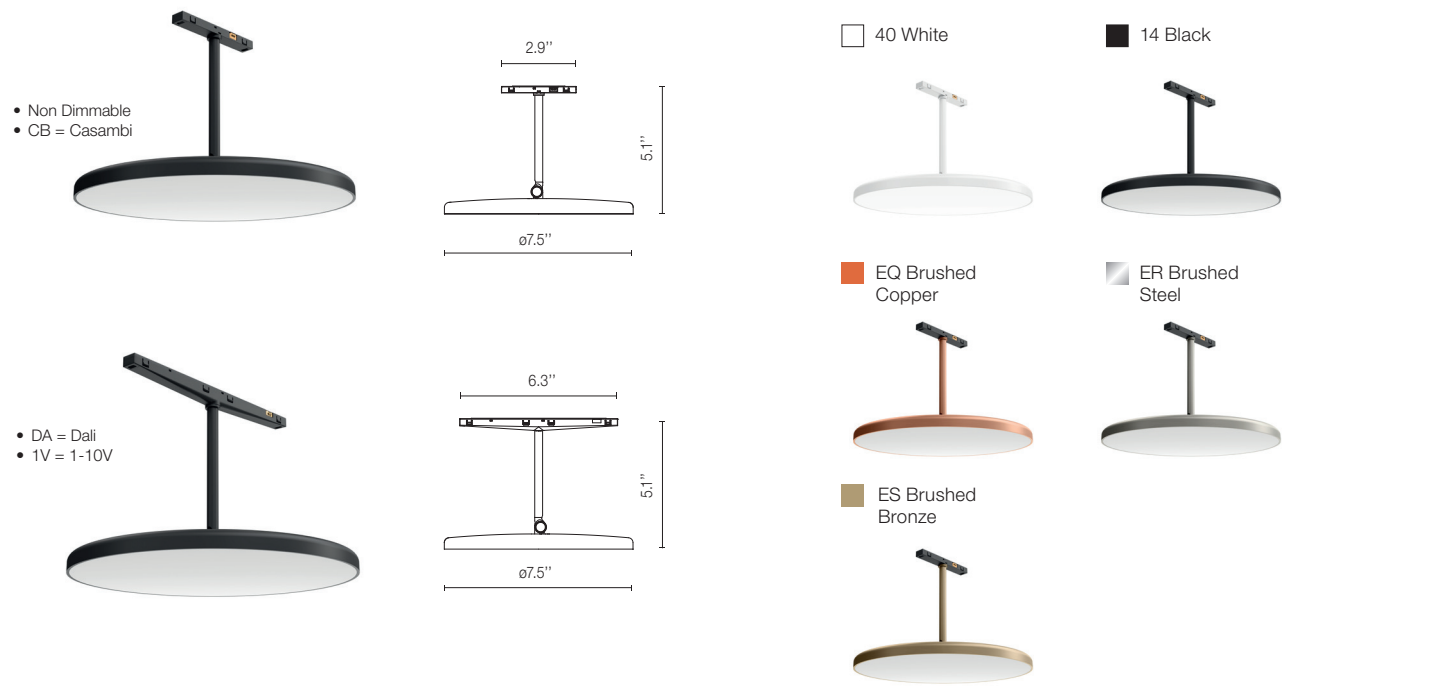

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric																		
2700	90	1005	395	10.5W	110° diffuser	05.5160	<div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div>	<ul style="list-style-type: none">• Non Dimmable• DA = Dali 2• 1V = 1-10V• CB = Casambi	<div><div></div><div></div><div><div>Beam Angle: 110°</div><table><tr><th>N(m)</th><th>E(ft)</th><th>D(m)</th></tr><tr><td>1</td><td>1.45</td><td>2.86</td></tr><tr><td>2</td><td>3.6</td><td>5.73</td></tr><tr><td>3</td><td>16</td><td>8.59</td></tr><tr><td>4</td><td>9</td><td>11.45</td></tr><tr><td>5</td><td>5</td><td>14.32</td></tr></table></div></div>	N(m)	E(ft)	D(m)	1	1.45	2.86	2	3.6	5.73	3	16	8.59	4	9	11.45	5	5	14.32
N(m)	E(ft)	D(m)																									
1	1.45	2.86																									
2	3.6	5.73																									
3	16	8.59																									
4	9	11.45																									
5	5	14.32																									
3000	90	1080	424	10.5W	110° diffuser	05.5161			<div><div></div><div></div><div><div>Beam Angle: 110°</div><table><tr><th>N(m)</th><th>E(ft)</th><th>D(m)</th></tr><tr><td>1</td><td>1.56</td><td>2.86</td></tr><tr><td>2</td><td>3.9</td><td>5.73</td></tr><tr><td>3</td><td>17</td><td>8.59</td></tr><tr><td>4</td><td>10</td><td>11.45</td></tr><tr><td>5</td><td>5</td><td>14.32</td></tr></table></div></div>	N(m)	E(ft)	D(m)	1	1.56	2.86	2	3.9	5.73	3	17	8.59	4	10	11.45	5	5	14.32
N(m)	E(ft)	D(m)																									
1	1.56	2.86																									
2	3.9	5.73																									
3	17	8.59																									
4	10	11.45																									
5	5	14.32																									


The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Light Stripe

LED diffuse lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.



CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Length	Part Number	Finish	Dimming Protocol	Photometric
2700	90	555	259	7W	115° diffuser	Light Stripe 600 24.2"	05.5290	14 Black	<ul style="list-style-type: none"> Non Dimmable 1V = 1-10V DA = Dali 2 	<p>Beam Angle: 115° 1 87 3.15 2 22 6.29 3 10 9.44 4 5 12.59 5 3 15.73 Luminous flux luminaire 259 lm</p>
3000	90	582	272	7W	115° diffuser	Light Stripe 900 36"	05.5292			<p>Beam Angle: 115° 1 87 3.15 2 43 6.29 3 19 9.44 4 11 12.59 5 7 15.73 Luminous flux luminaire 518 lm</p>
2700	90	1111	518	10W	115° diffuser	Light Stripe 1200 47.8"	05.5294			<p>Beam Angle: 115° 1 261 3.15 2 65 6.29 3 29 9.44 4 16 12.59 5 10 15.73 Luminous flux luminaire 777 lm</p>
3000	90	1166	544	10W	115° diffuser	Light Stripe 600 24.2"	05.5291	14 Black	<ul style="list-style-type: none"> Non Dimmable 1V = 1-10V DA = Dali 2 	<p>Beam Angle: 115° 1 91 3.15 2 23 6.29 3 10 9.44 4 5 12.59 5 4 15.73 Luminous flux luminaire 272 lm</p>
2700	90	1667	777	13.5W	115° diffuser	Light Stripe 900 36"	05.5293			<p>Beam Angle: 115° 1 182 3.15 2 46 6.29 3 20 9.44 4 11 12.59 5 7 15.73 Luminous flux luminaire 544 lm</p>
3000	90	1750	816	13.5W	115° diffuser	Light Stripe 1200 47.8"	05.5295			<p>Beam Angle: 115° 1 274 3.15 2 68 6.29 3 30 9.44 4 17 12.59 5 11 15.73 Luminous flux luminaire 816 lm</p>

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Light Shadow Spot 30




LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric	
2700	90	257	209	4W	10°	05.5170		<ul style="list-style-type: none">• Non Dimmable• DA = Dali• 1V = 1-10V		
3000	90	263	214	4W	10°	05.5175				
2700	90	257	201	4W	22°	05.5171		<ul style="list-style-type: none">• Non Dimmable• DA = Dali• 1V = 1-10V		
3000	90	263	205	4W	22°	05.5176				
2700	90	257	200	4W	33°	05.5172		<ul style="list-style-type: none">• Non Dimmable• DA = Dali• 1V = 1-10V		
3000	90	263	204	4W	33°	05.5177				
2700	90	257	209	4W	46°	05.5173		<ul style="list-style-type: none">• Non Dimmable• DA = Dali• 1V = 1-10V		
3000	90	263	214	4W	46°	05.5178				

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Optional Accessories - Light Shadow Spot 30

Honeycomb	CCT Increaser Filter D58 2700K >> 3125±75K 3000K >> 3600±75K	CCT Decreaser Filter D12 2700K >> 2450±75K 3000K >> 2700±75K
Part Number: 08.0790.00	Part Number: 08.0791.00	Part Number: 08.0792.00
		

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Light Shadow Spot 45

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.



Technical drawing showing dimensions (6.3", 4.4", 3.5", 4.6", 0.2") and color options (40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze).

CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700	90	799	650	10W	15°	05.5180	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	Non Dimmable, DA = Dali, 1V = 1-10V	Beam Angle: 15° Luminous flux luminaire 550 lm
3000	90	844	686	10W	15°	05.5185	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	Non Dimmable, DA = Dali, 1V = 1-10V	Beam Angle: 15° Luminous flux luminaire 586 lm
2700	90	799	645	10W	21°	05.5181	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	Non Dimmable, DA = Dali, 1V = 1-10V	Beam Angle: 21° Luminous flux luminaire 645 lm
3000	90	844	682	10W	21°	05.5186	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	Non Dimmable, DA = Dali, 1V = 1-10V	Beam Angle: 21° Luminous flux luminaire 582 lm
2700	90	799	646	10W	31°	05.5182	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	Non Dimmable, DA = Dali, 1V = 1-10V	Beam Angle: 31° Luminous flux luminaire 646 lm
3000	90	844	682	10W	31°	05.5187	40 White, 14 Black, EQ Brushed Copper, ER Brushed Steel, ES Brushed Bronze	Non Dimmable, DA = Dali, 1V = 1-10V	Beam Angle: 31° Luminous flux luminaire 582 lm

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

Optional Accessories - Light Shadow Spot 45

Honeycomb	CCT Increaser Filter D58 2700K >> 3125±75K 3000K >> 3600±75K	CCT Decreaser Filter D12 2700K >> 2450±75K 3000K >> 2700±75K
Part Number: 08.0793.00	Part Number: 08.0794.00	Part Number: 08.0795.00
		







Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

My Spot 25 Short

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).



CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700	90	257	167	4.7W	11°	05.5300	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	
		232	151	3.8W					
3000	90	265	172	4.7W	11°	05.5305	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	
		239	155	3.8W					
2700	90	257	173	4.7W	25°	05.5301	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	
		232	156	3.8W					
3000	90	265	178	4.7W	25°	05.5306	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	
		239	160	3.8W					
2700	90	257	170	4.7W	40°	05.5302	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	
		232	153	3.8W					
3000	90	265	175	4.7W	40°	05.5307	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	
		239	158	3.8W					







Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

My Spot 25 Long

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).



CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700	90	257	167	4.7W	11°	05.5310	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	
		232	151	3.8W					
3000	90	265	172	4.7W	11°	05.5315	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	
		239	155	3.8W					
2700	90	257	173	4.7W	25°	05.5311	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	
		232	156	3.8W					
3000	90	265	178	4.7W	25°	05.5316	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	
		239	160	3.8W					
2700	90	257	170	4.7W	40°	05.5312	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	
		232	153	3.8W					
3000	90	265	175	4.7W	40°	05.5317	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	
		239	158	3.8W					

Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

My Spot 35 Short

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).



CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700	90	756	580	11W	15°	05.5320	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	<p>Beam Angle: 15° 1 7675 0.27 2 1919 0.53 3 853 0.80 4 480 1.07 5 307 1.34 Luminous flux luminaire 580 lm</p>
		639	490	8W					
3000	90	799	613	11W	15°	05.5325	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	<p>Beam Angle: 15° 1 8112 0.27 2 2028 0.53 3 901 0.80 4 507 1.07 5 324 1.34 Luminous flux luminaire 513 lm</p>
		675	518	8W					
2700	90	756	642	11W	21°	05.5321	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	<p>Beam Angle: 21° 1 5279 0.38 2 1320 0.75 3 587 1.13 4 330 1.51 5 211 1.88 Luminous flux luminaire 542 lm</p>
		639	543	8W					
3000	90	799	679	11W	21°	05.5326	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	<p>Beam Angle: 21° 1 5583 0.38 2 1396 0.75 3 520 1.13 4 349 1.51 5 223 1.88 Luminous flux luminaire 579 lm</p>
		675	573	8W					
2700	90	756	641	11W	32°	05.5322	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	<p>Beam Angle: 32° 1 1998 0.58 2 500 1.16 3 222 1.75 4 125 2.33 5 80 2.91 Luminous flux luminaire 541 lm</p>
		639	542	8W					
3000	90	799	677	11W	32°	05.5327	40 White 14 Black EQ Brushed Copper ER Brushed Steel ES Brushed Bronze	• Non Dimmable • DA = Dali • 1V = 1-10V • CB = Casambi	<p>Beam Angle: 32° 1 2110 0.58 2 528 1.16 3 234 1.75 4 132 2.33 5 84 2.91 Luminous flux luminaire 577 lm</p>
		675	572	8W					







Zero Track Pro Recessed

High-tech LED lighting system for interior architecture

My Spot 35 Long

LED projection lighting module for installation in the Zero Track Pro system. Electronic DC/DC converter incorporated. Individual wireless adjustment via Casambi. Casambi control implemented via the FLOS Control® app for mobile devices (available in the Apple Store and Google Play).



CCT	CRI	Initial Lumens	Delivered Lumens	Watts	Beam Spread	Part Number	Finish	Dimming Protocol	Photometric
2700	90	756	580	11W	15°	05.5330	<div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div>	<ul style="list-style-type: none">• Non Dimmable• DA = Dali• 1V = 1-10V <ul style="list-style-type: none">• CB = Casambi	<div><div>15°</div><div></div><div>Beam Angle: 15° 1 7675 0.27 2 1919 0.53 3 853 0.80 4 480 1.07 5 307 1.34 Luminous flux luminaire 580 lm</div></div>
		639	490	8W					<div><div>15°</div><div></div><div>Beam Angle: 15° 1 8112 0.27 2 2028 0.53 3 901 0.80 4 507 1.07 5 324 1.34 Luminous flux luminaire 513 lm</div></div>
2700	90	756	642	11W	21°	05.5331	<div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div>	<ul style="list-style-type: none">• Non Dimmable• DA = Dali• 1V = 1-10V <ul style="list-style-type: none">• CB = Casambi	<div><div>21°</div><div></div><div>Beam Angle: 21° 1 5279 0.38 2 1320 0.75 3 587 1.13 4 330 1.51 5 211 1.88 Luminous flux luminaire 542 lm</div></div>
		639	543	8W					<div><div>21°</div><div></div><div>Beam Angle: 21° 1 5583 0.38 2 1396 0.75 3 520 1.13 4 349 1.51 5 223 1.88 Luminous flux luminaire 579 lm</div></div>
2700	90	756	641	11W	32°	05.5332	<div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div>	<ul style="list-style-type: none">• Non Dimmable• DA = Dali• 1V = 1-10V <ul style="list-style-type: none">• CB = Casambi	<div><div>32°</div><div></div><div>Beam Angle: 32° 1 1998 0.58 2 500 1.16 3 222 1.75 4 125 2.33 5 80 2.91 Luminous flux luminaire 541 lm</div></div>
		639	542	8W					<div><div>32°</div><div></div><div>Beam Angle: 32° 1 2110 0.58 2 528 1.16 3 234 1.75 4 132 2.33 5 84 2.91 Luminous flux luminaire 577 lm</div></div>
3000	90	799	677	11W	32°	05.5337	<div><div></div>40 White</div> <div><div></div>14 Black</div> <div><div></div>EQ Brushed Copper</div> <div><div></div>ER Brushed Steel</div> <div><div></div>ES Brushed Bronze</div>	<ul style="list-style-type: none">• Non Dimmable• DA = Dali• 1V = 1-10V <ul style="list-style-type: none">• CB = Casambi	
		675	572	8W					