


RAYPAK TECHNICAL DATA SHEET

Domestic DP Series SPARTAN 131 *CO



The Raypak domestic direct spa heaters are designed to heat the spa directly through the heater. These units are supplied with capron headers, and a powder coated body to enable them to handle the demands of a domestic environment.

These units come with a three year parts and a one year labour warranty.

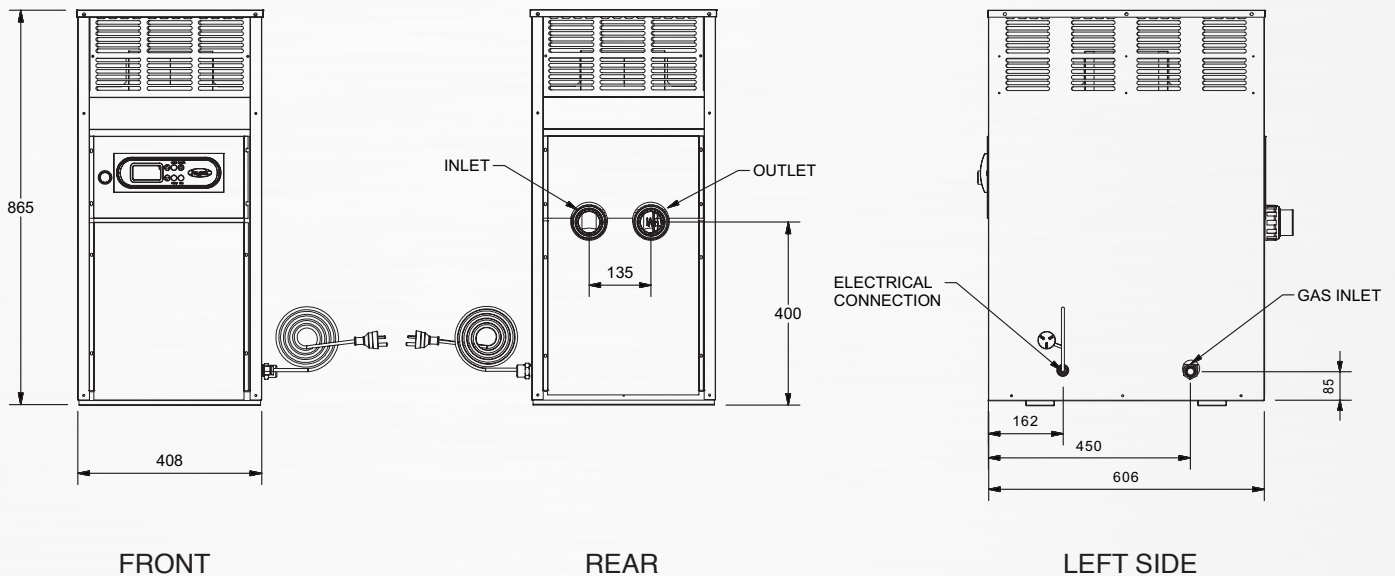

Model SPARTAN 131 *CO

Installation	External	
Control System	On / Off	
* NNO denotes	N (Natural Gas)	N (Cupro Heat Exchanger) O (On / Off operation)
* PNO denotes	P (Propane)	N (Cupro Heat Exchanger) O (On / Off operation)
Hourly Gas Input MJ/ hr	Natural Gas	120
	LPG / Propane	117
Hourly Energy Output kW	Natural Gas	24
	LPG / Propane	24

Rheem Thermal is continually seeking to improve the performance of its heating product. Product specification information provided above is correct at the date of publication, this data may change without notice. Product data should be verified at the time of order. Product is sold subject to Rheem Thermal's Standard Conditions of Sale.



RAYPAK TECHNICAL DATA SHEET

Domestic DP Series SPARTAN 131 *CO



Model SPARTAN 131 *CO

Gas Pressure kPa	Natural Gas	Min .77	Max 3.5
	LPG /Propane	Min 2.75	Max 3.5
Test Point Pressure kPa	Natural	.85	Propane 2.56
Water Connections mm F.1		40	
Flue mm		Not Approved	
Flow rate L/ sec		Min 1.5	Max 6.9
Gas Connections mm M.I	Natural Gas	20	
	LPG /Propane	20	
Max Thermostat Setting - °C		40	
Electrical Specifications		240 Volt A.C 50 Hz 100 VA (approx)	
Weight (approx kg)		35	

Clearances	Non Combustible (mm)	Combustible (mm)
Rear	300	500
Left Side	300*	500
Front	750	750
Right Side	300*	500
Ceiling	1200	1200

***Note:** The minimum clearance shown on the compliance plate shows 300mm, however a minimum clearance of 600mm is required for service access.

Rheem Thermal is continually seeking to improve the performance of its heating product. Product specification information provided above is correct at the date of publication, this data may change without notice. Product data should be verified at the time of order. Product is sold subject to Rheem Thermal's Standard Conditions of Sale.

