

Technical submittal



Products: **Burstock expansion vessel PV1000W**

Project:

Customer:

Date:

- ⊗ Floor standing expansion vessel
- ⊗ 1000 litres capacity
- ⊗ 10bar max pressure
- ⊗ Nitrogen pre-charged
- ⊗ 1.7bar pre-charge pressure (Heating)
- ⊗ 3.5bar pre-charge available on request (DHW)
- ⊗ WRAS approved
- ⊗ Butyl rubber diaphragm suitable for temperatures of 70°C




Model	Capacity (litres)	Connection size	Max pressure (bar)	Shipping weight (kg)	Pre-charge pressure (bar)		Dimensions			
					Heating	DHW	A	B	C	D
PV1000W	1000	G1½"	10	228	1.7	*	740	2235	2604	263

* 3.5 bar pre-charge available on request

Model no.	Vessel(s) capacity (litres)	# Max. system volume supported for given vessel capacity (litres)		† Estimated max. installed boiler power for given vessel capacity (kW)	
		Water only	@10% antifreeze	Water only	@10% antifreeze
PV1000W	1000	12069	10638	1206	1063

Based on 80°C maximum flow temperature and factory pre-sets: Cold fill pressure = 1.8bar, vessel charge pressure = 1.7bar, acceptance volume factor 0.35, expansion factors: water 0.029, antifreeze @10% solution 0.0329.

† Estimated using 1kW of installed power for every 10 litres of system volume. Note that maximum system volume supported by a given vessel capacity is around 12% less for a system using antifreeze @10% solution in water when compared against using water alone.

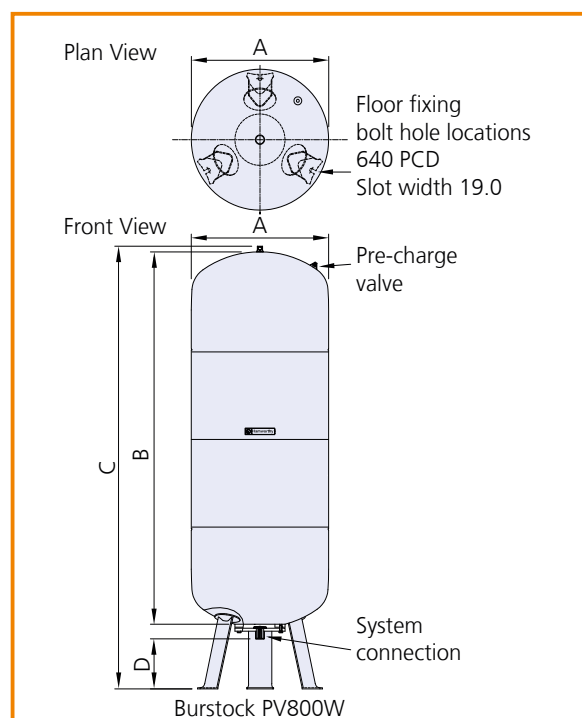

Every effort has been taken to ensure the details are accurate. Hamworthy Heating does not, however, guarantee the accuracy or completeness of any information nor does it accept liability for any errors or omissions in the information. Hamworthy Heating reserves the right to make changes and improvements which may necessitate alteration to product specification without prior notice.