

Technical submittal



Products: **Upton UF100-1**

Project:

Customer:

Date:

- ⊗ Aluminium heat exchanger
- ⊗ 5:1 turndown ratio
- ⊗ 6 bar rated heat cell
- ⊗ 5-year heat exchanger warranty
- ⊗ 97.4% gross seasonal efficiency
- ⊗ 89.1kW output @80/60°C
- ⊗ Fits in a footprint of 700 x 940mm
- ⊗ Passes through a standard door width
- ⊗ 33mg/kWh NOx emissions gross (natural gas)
- ⊗ Noise at maximum modulation of 55.8dba
- ⊗ Built-in controls platform with sequence control and capable of controlling up to 16 boiler modules and hot water circuits
- ⊗ British manufactured



	Boiler model	Units	UF100-1
	No. of modules		1
Energy	Building Regulations Part L seasonal efficiency	% gross	97.4
	Building Regulations Part L seasonal efficiency	% nett	108.2
	Boiler output 80/60°C	kW	89.1
	Boiler output 50/30°C	kW	98.6
	Boiler input gross (maximum)	kW	103
	Boiler input nett (maximum)	kW	92.8
	Boiler output 80/60°C (minimum)	kW	17.8
	Boiler output 50/30°C (minimum)	kW	19.7
Water	Water content	litres	9
	System design flow rate @ 11°C ΔT rise	l/s	2.2
	Water side pressure loss @ 11°C ΔT rise	mbar	736
	System design flow rate @ 20°C ΔT rise	l/s	1.2
	Water side pressure loss @ 20°C ΔT rise	mbar	225
	Minimum operating water pressure	barg	0.5
	Maximum operating water pressure	barg	5.3
	Maximum water pressure	barg	6
	Maximum flow temperature setting	°C	85
Gas	Minimum flow temperature setting	°C	30
	Gas flow rate (maximum) (Nat gas)	m³/hr	9.8
	Nominal inlet pressure (Nat gas)	mbar	20
Flue	Maximum inlet pressure (Nat gas)	mbar	25
	Approx flue gas volume @ 72°C , 9.0% CO ₂	m³/hr	155
	Maximum flue gas temperature @ 80/60°C	°C	72
	Maximum flue gas temperature @ 50/30°C	°C	42
	Pressure available at flue connection	Pa (mbar)	150 (1.5)
	NO _{x,pond,Hs} (gross) emission (0% excess oxygen, dry air) (Nat gas)	mg/kWh	33
	NO _{x,pond} (nett) emission (0% excess oxygen, dry air) (Nat gas)	mg/kWh	37
Connection	NO _x Class		6
	Water flow/return connections	inches	R2-11
	Gas inlet connection pipe thread size	inches	G1¼
	Flue connection diameter (I/D)	mm	130
	Condensate trap connections (O/D)	mm	34
Electrics	Electrical supply		230V ~ 50Hz
	Power consumption - maximum boiler modulation	W	139
	Run current (per module)	Amp	0.6
	Approx shipping weight	kg	152
	Noise emission @1m @max modulation (per module)	Max dB (A)	55.8

*Dependent on ΔT - see full brochure



Technical submittal

Products: **Upton UF100-1**

Project:

Customer:

Date:

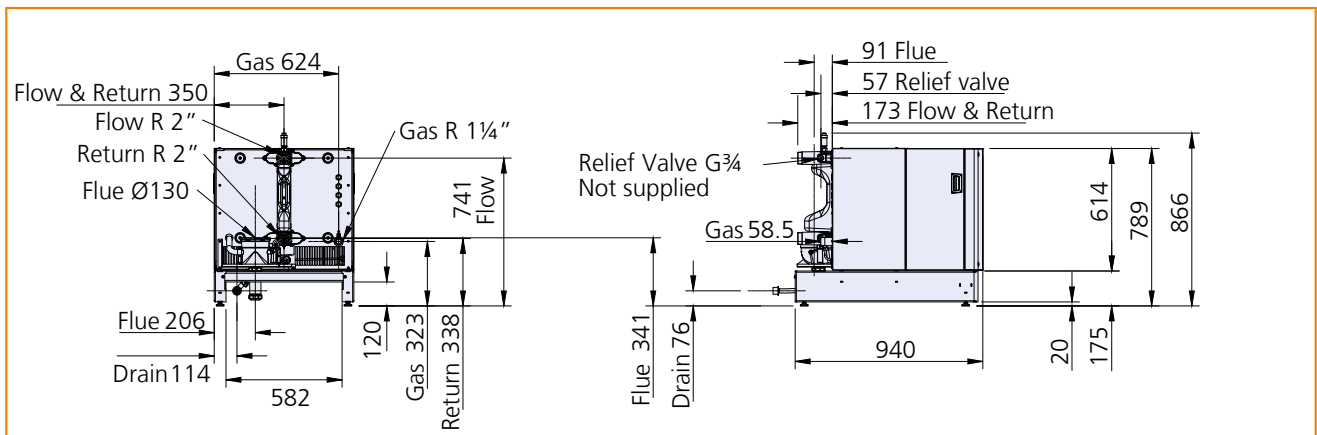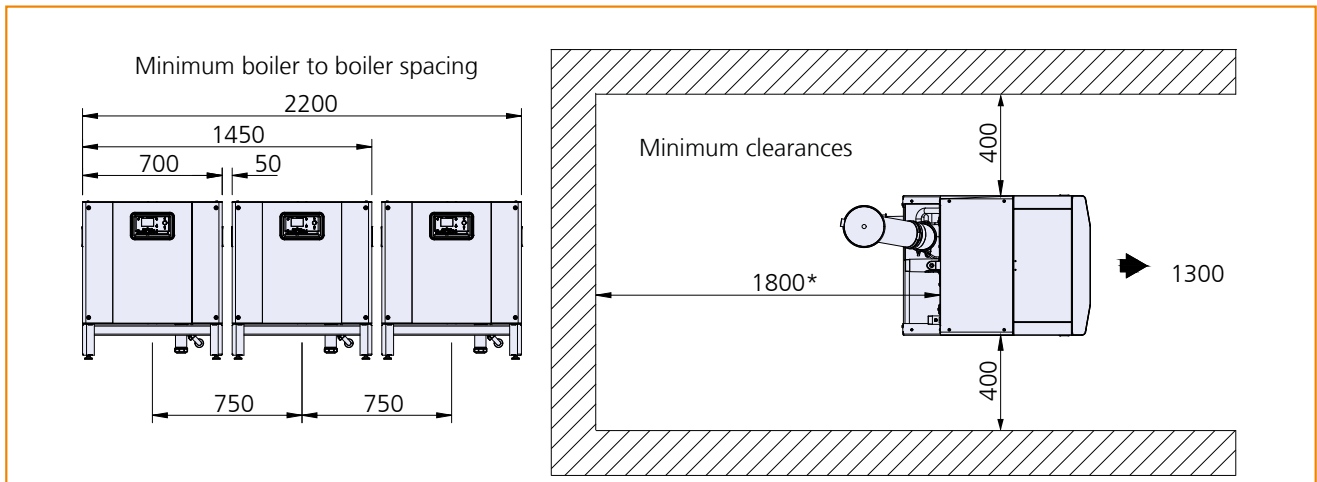

*Note: Rear clearance required when using Hamworthy pipe kits.

All dimensions in mm unless otherwise stated.