


QUICKFORM POLYPRO


PERMANENT FORMWORK

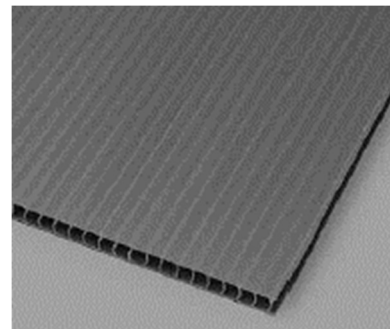

Updated 10/09/2024

Presentation

- Permanent formwork system supplied in polypropylene sheets.
- For all foundation formwork and floor recess requirements.
- Quick and easy to install.
- Highly resistant yet lightweight material, making it easy to transport.
- Adaptable for last-minute changes.
- Optimises the amount of concrete used in foundations.
- Optimises excavation volumes.
- Eliminates the need for fairing concrete in the case of permanent formwork.
- Formwork is completely waterproof to laitance during pouring.
- The sheets can be easily bent after being cut to half the thickness of a cell using a cutter.

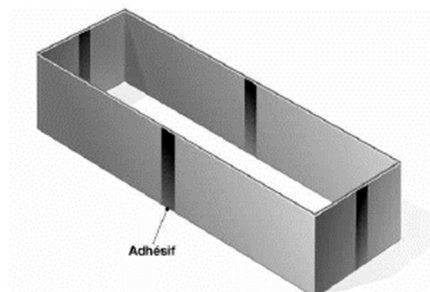

Dimensions and Materials

Dimensions

Code	Name	Dimensions length /width (mm)	Thickness (mm)
018330	QUICKFORM / POLYPRO PLQ 2.40X2.00 (m²)	2400x2000	7
912926	QUICKFORM / POLYPRO PLQ 2.40X1.20 (m²)	2400x1200	7

Materials

- Polypropylene sheet
- Density of 0.900 to 0.905 g/cm³ according to ISO 1183
- Weight 1200 g/m²

Packaging

Code	Name	Sale size	Weight/m ² (kg)
018330	QUICKFORM / POLYPRO PLQ 2.40X2.00 (m ²)	1 sheet=4.80m ²	1.72
912926	QUICKFORM / POLYPRO PLQ 2.40X1.20 (m ²)	1 sheet=2.88m ²	1.50

The information provided in this document is for guidance only and reflects our current knowledge. We shall not be responsible or liable for any improper or inappropriate use of our products.

Given the wide range of possible uses, our recommendations do not exempt users from carrying out their own tests. Our laboratory and technical department will be happy to provide you with any information you may require.

TAM Groupe Z.I. Avenue Albert Einstein.
CS 90043 - 77555 Moissy Cramayel Cedex - France
S.A.S. au capital de 883 332 € RCS Melun B
SIRET 313 659 674 00029 - FR 76 313 659 674

Tel.: + 33 1 64 13 30 00 – tamgroupe@tamgroupe.fr – www.tamgroupe.fr