

SHEAR CONE

CONES FOR CLIMBING FORMWORK



Updated on 29/11/2024


Description and application

- Shear cones 26.55.24/26.55.30/32.64.30
- Steel cones for shear load
- To be used with Hex screws or Adapters
- Tools for the installation : wrench BTR 17 ref 101198 or wrench BTR 19 ref 100199



Dimensions

Bar Ø		Ø15/17	Ø15/17	Ø20/23
Designation		26.55.24	26.55.30	32.64.30
Article n°		100249	100252	100291
HEX	mm	17	19	19
Thread F	mm	M24x3.0	M30x3.5	M30x3.5
Lf	mm	46	46	43
L	mm	105	105	120
L1	mm	60	60	65
Ø D	mm	55	55	64
Weight	g	880	800	1310
Working load	kN	95	95	172
Breaking load	kN	195	195	345

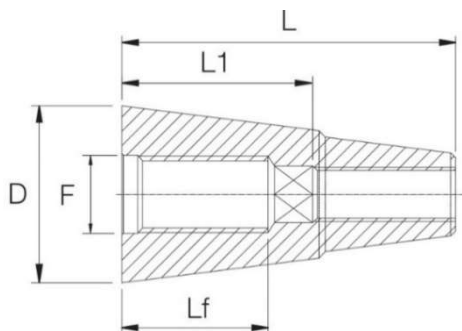

The information provided in this document is for guidance only and reflects our current knowledge. We shall not be responsible or liable for any improper or inappropriate use of our products.

Given the wide range of possible uses, our recommendations do not exempt users from carrying out their own tests. Our laboratory and technical department will be happy to provide you with any information you may require.

TAM Groupe Z.I. Avenue Albert Einstein.
CS 90043 - 77555 Moissy Cramayel Cedex - France
S.A.S. au capital de 883 332 € RCS Melun B
SIRET 313 659 674 00029 - FR 76 313 659 674

Tel. : + 33 1 64 13 30 00 – tamgroupe@tamgroupe.fr – www.tamgroupe.fr