

SanFresh 30

Formerly SupaMap 30 · Corebrew 30

Modified atmosphere packaging mixture

GAS SPECIFICATION

COMPONENT	FORMULA	UNIT	RESULT
Carbon dioxide	CO ₂	%	30 ± 3%
Nitrogen	N ₂	%	70

PACKAGE SPECIFICATION

Valve type (AS 2473.2)	Type 50
Cylinder colour (AS 4484)	Green grey dome and shoulder, pewter body

Refer to AS 4484 for cylinder colour identification.

QUALITY STANDARDS & CONFORMANCE

Food	CO ₂ to ISBT beverage grade; N ₂ food grade
Food safety	FSSC 22000 · Codex HACCP
Quality	ISO 9001 certified quality management system

DANGEROUS GOODS		COMPRESSED GAS, N.O.S. (contains carbon dioxide)
UN NO. UN 1956	DG CLASS Class 2.2	

SPECIFICATIONS

CYL SIZE	NS	SG	VOLUME (M ³)	PRESS. ¹ (BAR)	DIMENSIONS ⁴ (MM)
G	247155	10265	8	150	1500(H) 230(Ø)
6PK	247506	10070	63.7	193	1905(H) 795(W) 505(D)
12PK	247518	10086	127.4	193	1905(H) 1020(W) 795(D)

Bulk Contact us for information on bulk options.

Part numbers: NS — Coregas (Nippon Sanso Holdings Australia); SG — Supagas.

CERTIFICATES OF CONFORMANCE

Certificate of conformance available.

PRODUCT RANGE

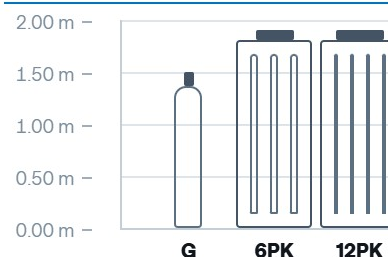


Chart is a visual representation only. Please use as a guide.

Always refer to the safety data sheet before use. SDS #0067

SCAN FOR
THE SDS



This information is a guide only. Some sizes may not be available in all areas; other sizes may be available on request. ¹ At 15°C; cylinder pressure varies with ambient temperature. ² Valve type and outlet designation to AS 2473.2. ⁴ Height includes valve. Contents based at atmospheric pressure at 15°C.