

SanMix 70

Formerly SupaMix 70 · Corebrew 75

Beverage gas for highly carbonated draught beers and lagers, including long-draw systems

GAS SPECIFICATION

COMPONENT	FORMULA	UNIT	RESULT
Carbon dioxide	CO ₂	%	70 ± 7%
Nitrogen	N ₂	%	Balance

PACKAGE SPECIFICATION

Valve type (AS 2473.2)	Type 30
Cylinder colour (AS 4484)	Pewter dome and shoulder, green grey body

Refer to AS 4484 for cylinder colour identification.

QUALITY STANDARDS & CONFORMANCE

Food	CO ₂ to ISBT beverage grade; N ₂ food grade
Food safety	FSSC 22000 · Codex HACCP
Quality	ISO 9001 certified quality management system

DANGEROUS GOODS		COMPRESSED GAS, N.O.S. (contains carbon dioxide)
UN NO. UN 1956	DG CLASS Class 2.2	

SPECIFICATIONS

CYL SIZE	NS	SG	VOLUME (M ³)	PRESS. ¹ (BAR)	GROSS WT ³ (KG)	DIMENSIONS ⁴ (MM)
D	246118	10067	2.1	115	15	600(H) 185(Ø)
F	246159	10068	7	115	40	1235(H) 205(Ø)
Bulk	Contact us for information on bulk options.					

Part numbers: NS — Coregas (Nippon Sanso Holdings Australia); SG — Supagas.

PRODUCT RANGE

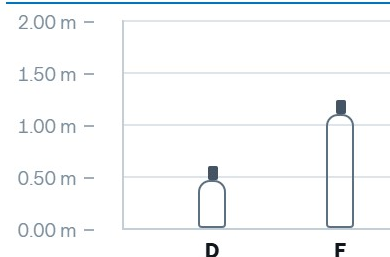


Chart is a visual representation only. Please use as a guide.

CERTIFICATES OF CONFORMANCE

Certificate of conformance available.

Always refer to the safety data sheet before use. SDS #0067

SCAN FOR THE SDS



This information is a guide only. Some sizes may not be available in all areas; other sizes may be available on request. ¹ At 15°C; cylinder pressure varies with ambient temperature. ² Valve type and outlet designation to AS 2473.2. ³ Weights are nominal and vary with manufacturing tolerance. ⁴ Height includes valve. Contents based at atmospheric pressure at 15°C.