

Argon, Ref. Liq.



Description

Argon gas is inert, colourless, odourless and tasteless. In its liquid form colourless and odourless.

Applications

- G.M.A. and G.T.A. welding materials
- Inert atmospheres
- Filler gas in incandescent and neon lamps
- Plasma cutting (mixed with hydrogen)
- Gas chromatography
- Spectrometry
- Purge gas
- Aluminium & steel production
- Glass manufacturing

Hazard statement(s)

- Contains refrigerated gas; may cause cryogenic burns or injury.

Prevention statement(s)

- Wear cold insulating gloves/face shield/eye protection.

Response statement(s)

- Get immediate medical advice/attention.
- Thaw frosted parts with lukewarm water. Do not rub affected area.

Storage statement(s)

- Store in a well-ventilated place.

Storage statement(s)

- Asphyxiant. Effects are proportional to oxygen displacement.

Signal Word: Warning

UN No.: 1951

Hazard No.: 2T

Chem Symbol: Ar

Pictograms:



Argon, Ref. Liq.



General Specifications

Physical Data	
Chemical Symbol	Ar
Boiling Point	-185.9°C
Relative Density (Air=1)	1.4
Molecular Weight	39.948
Critical Temperature	-122.4°C
Flashpoint	Non flammable
Density of Gas @ 101.3 kPa & 15°C	1.78 kg/m ³
Density of Liquid (B.Pt.)	1393 kg/m ³
Specific Volume @ 101.3 kPa & 15°C	0.591 m ³ /kg

Storage Tanks

Tank Size Range
>1,000 - < 60,000 lt


Quality Assurance

Supagas Pty Ltd is committed to comply with the requirements of ISO 9001-2019 and to continually improve the effectiveness of our Quality Management System.

Everyone at Supagas understands we must provide a safe environment for both our employees and the wider community. We are therefore committed to implement and maintain a continual improvement approach throughout the organisation whilst also meeting all applicable statutory and regulatory requirements.

For Further Information

On how we can help you with all your residential and industrial gas needs, view our website supagas.com.au, call Customer Service on 13 78 72 or drop in to your local Supagas branch.

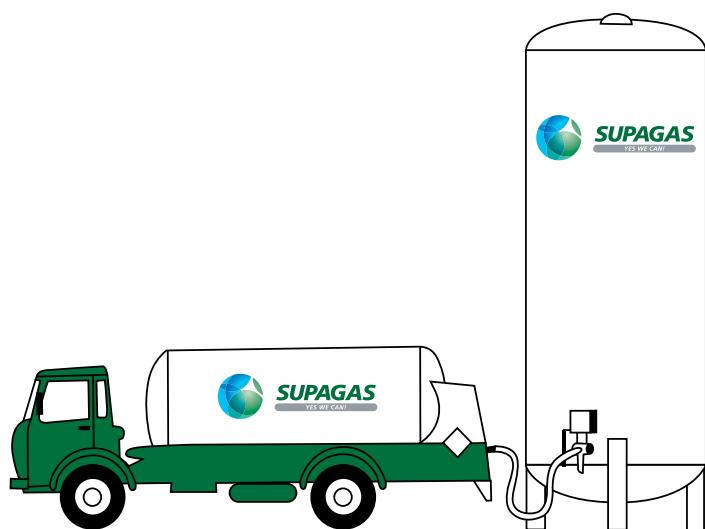

Typical Analysis

Product Type	Ar	O ₂	Moisture
Refrigerated Liquid	>99.999%	5ppm	<5ppm