

BEST T Deadbolt

Key Figures

Lifetime per unit: 1,000,000 cycles
Weight per unit: 1.3 kg
Production location: Indianapolis, US

Production standards


Quality	Environmental	Occupational Health & Safety	Energy	Produced with green electricity
ISO 9001 certified	ISO 14001 certified			

Product declarations

Environmental Product Declaration	Health Product Declaration	Building Product Declaration	SuPIM Data Sheet
✓	✓		


Material used (%)

■ Brass ■ Paper ■ Stainless steel ■ Steel

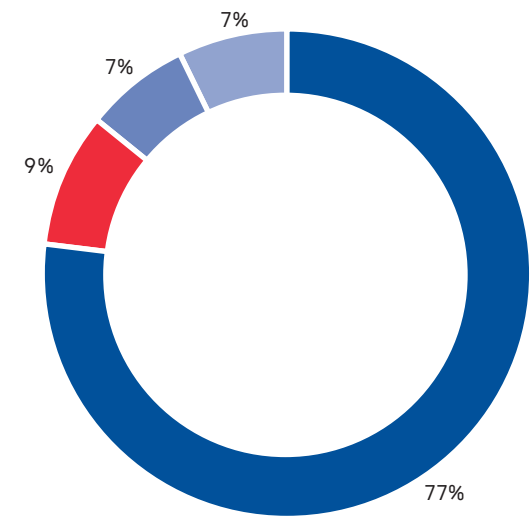

The GWP¹ across the life cycle is 2.4 kg CO₂e

This is similar to the CO₂ produced from a road trip with a diesel mid-range car from Rümlang to Zürich airport

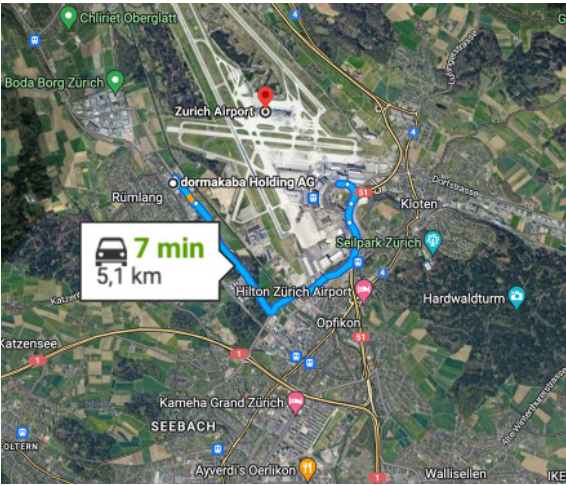

¹ Carbon dioxide equivalent (CO₂e) is the universal unit of measurement to indicate the global warming potential (GWP) of each of the six greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide. It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis.



Scan the QR code or click here for more information about sustainability



Scan the QR code or click here for more information about our sustainability product declaration.



Description

Built with identical tubular assemblies, the 8T both fit standard door preps. The 8T is often paired with a cylindrical lock in commercial office spaces, residential applications and other spaces where there is a greater need for security and, more specifically, a deadbolt that is more resistant to brute force attack. The 8T is also available with lead line options, making it a good solution for radioactive doors in health-care facilities.

Total Global Warming Potential per life cycle stage (kg CO₂e)

